


Please Approve
This Drawing

Date

Signature

REVISIONS			
No.	DESCRIPTION	ECN No.	DATE
	INITIAL RELEASE	ECN.220120822002	2012.08.22

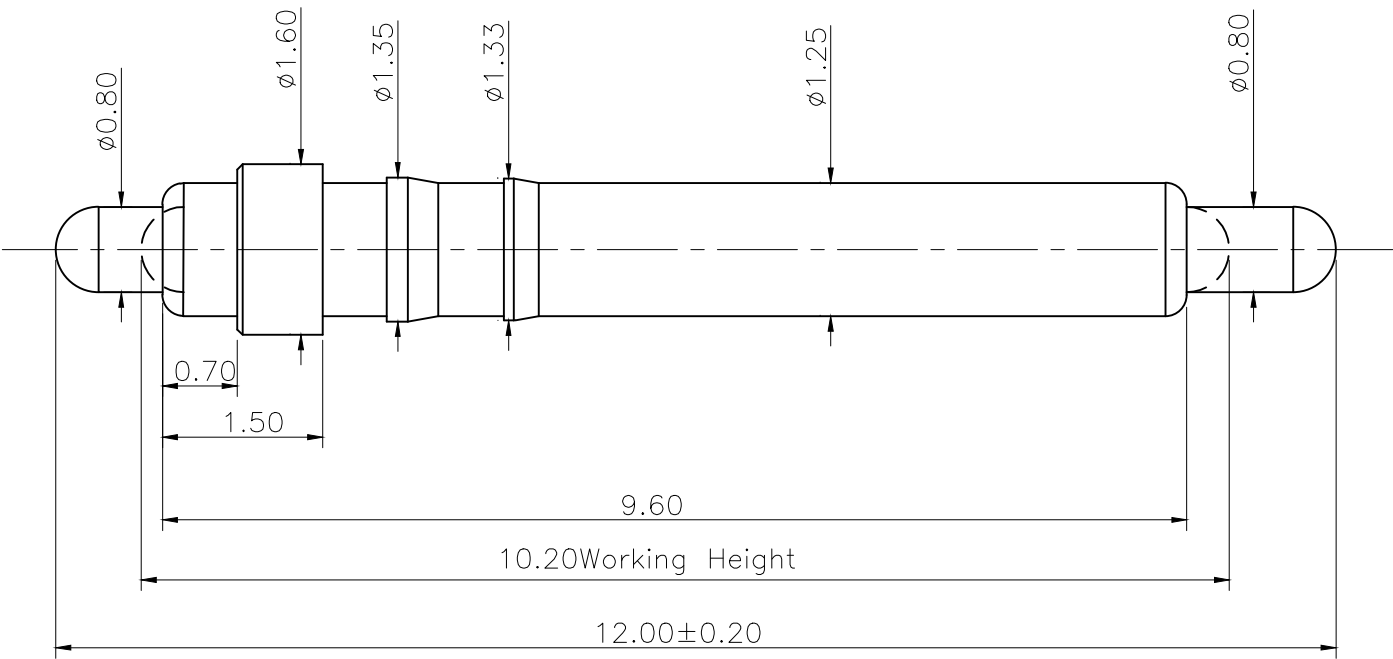

NOTE;

- Material
Barrel & Plunger: Brass
Spring: SUS304
- Plating
Plunger: 30 micro-inch Min. Au over 120 micro-inch Ni Min.
Barrel: 30 micro-inch Min. Au over 120 micro-inch Ni Min.
- Electrical
Rated current & voltage: DC12V; 1A Max.
Contact resistance: 50 mohm Max. at working height(quiescence)
- Mechanical
Spring force: $150g \pm 20\%$ at working height(quiescence).
Durability: 10,000 cycles(minimum)
- To ensure the best usage, please operate it based on the working height.
- RoHS and HF compliant product.

DRAWN	董丰田	SCALE:	10 : 1	UNIT	mm	DRAWING NO.	D1079XX01
CHECKED		SHEET:	1 of 1	PROJECT		TITLE: Pogo Pin	
APPROVED		DATE:	2012.08.22	VER.	A.1		
THE UNMARKED TOLERANCE ARE AS BELOW :						C.C.P. (DG) CONTACT PROBES CO.,LTD. 东莞中探探针有限公司	
LENGTH		ANGLE					
0~6.0	$\pm 0.05mm$	0.	$\pm 2.0^\circ$				
>6~30	$\pm 0.10mm$	0.0	$\pm 1.0^\circ$				
>30~120	$\pm 0.15mm$	0.00	$\pm 0.50^\circ$				
						The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.	