
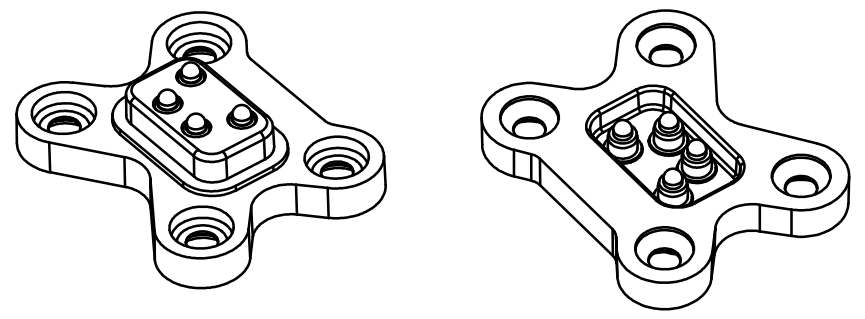
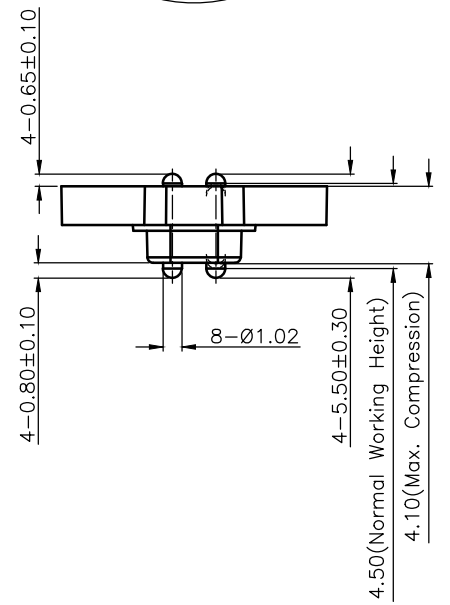
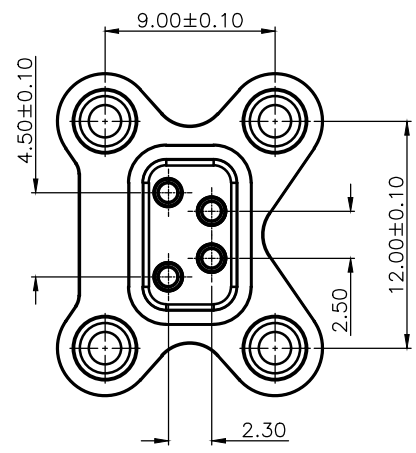
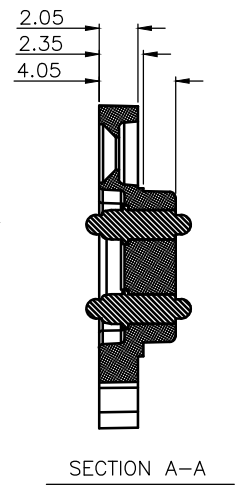


Please Approve this Drawing

Date	
Signature	

REVISIONS (修正)			
NO. (序号)	DESCRIPTION(描述)	ECN NO.(变更号)	DATE(日期)
A.0	NEW RELEASE	ECN-2201505057	2015.05.27

- NOTES:
- Materials:
 - .Housing: LCP+30%G.F UL94V-0 Black
 - .Plunger: brass
 - .Barrel: brass
 - .Spring&Ball: SUS304
 - Plating:
 - .Plunger: 10 micro-inch minimum Au over 50~100 micro-inch nickel.
 - .Barrel : 10 micro-inch minimum Au over 50~100 micro-inch nickel.
 - Electrical:
 - .Rated current & voltage: DC12V, 0.5A Max.
 - .Contact resistance: 200 mohm maximum at working height(quiescence)
 - Mechanical:
 - .Normal force:80g±20% at 4.50mm Normal working height
 - .Durability: 10,000 cycles(minimum)
 - To ensure the best usage,please operate it based on the working height
 - .Based on the engineering drawings,shall not exceed the maximum allowed compression
 - Harmful material control please follow DOC. NO. "DQ03050"

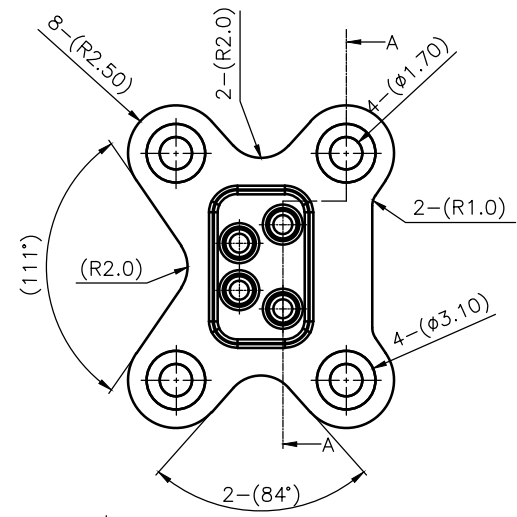

DRAWN (设计)	Ma Zengshi	SCALE (比例)	5 : 2	UNIT (单位)	mm	DRAWING NO. (图号)	D1235AA01-04B230HB
CHECKED (确认)		SHEET (页数)	1 of 1	PROJECT (视图)		TITLE (品名)	4pin Pogo pin Conn.
APPROVED (核准)		DATE (日期)	2015.05.27	VER. (版本)	A.0		
THE UNMARKED TOLERANCE ARE AS BELOW : (未标记的公差)							
LENGTH (尺寸)		ANGLE (角度)					
0~6.0	±0.05mm	0.	±2.0°				
>6~30	±0.10mm	0.0	±1.0°				
>30~120	±0.15mm	0.00	±0.50°				
				C.C.P. (DG) CONTACT PROBES CO.,LTD. 东莞中探探针有限公司			
The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.							