
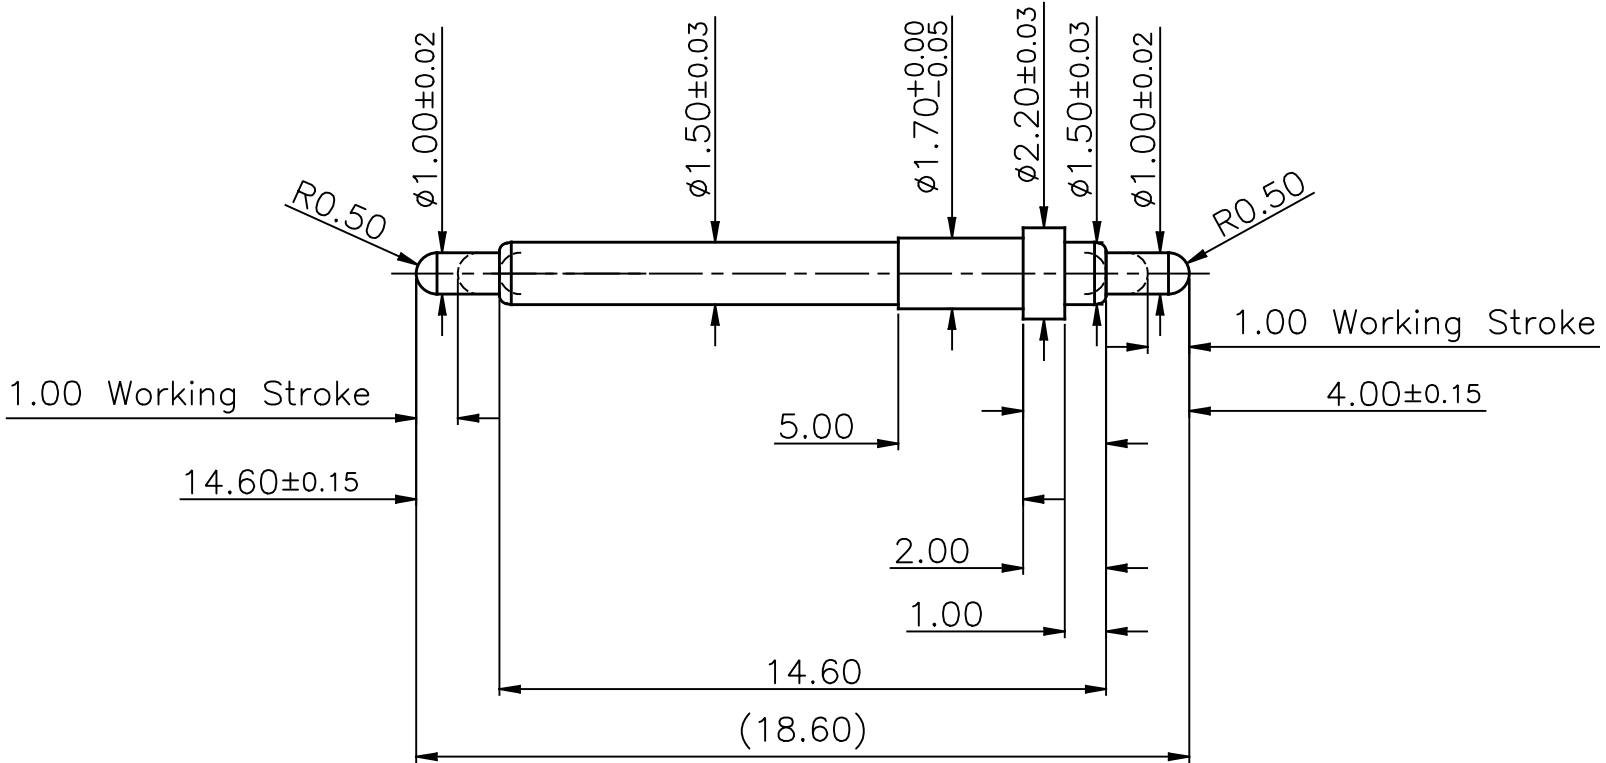


Please Approve this Drawing

Date	
Signature	

REVISIONS			
No.	DESCRIPTION	ECN No.	DATE
	INITIAL RELEASE	ECN-10082301	08.23.2010



NOTE;

- Material
Barrel : Brass C3604
Plunger : Brass C3604
Spring : SUS304
- Plating
Plunger : 10 micro inch minimum Au over 50~100 micro inch nickel
Barrel : 10 micro inch minimum Au over 50~100 micro inch nickel
- Electrical
Rated current & voltage:DC 12V ; 1A
Contact resistance:100 mohm maximum at working stroke(quiescence)
- Mechanical
Spring force:60g±20% at working stroke.(one side Compression)
Durability:10,000 cycles(minimum)
- To ensure the best usage,please operate it based on the working height.
Maximum allowed compression shall not be exceeded based on the engineering drawing.
- RoHS compliant product.

DRAWN	覃文嬌	SCALE:	10 : 1	UNIT	mm	DRAWING NO.	D406AA01
CHECKED		SHEET:	1 of 1	PROJECT		TITLE: Pogo Pin	
APPROVED		DATE:	08.23.2010	VER.	A.0		

THE UNMARKED TOLERANCE ARE AS BELOW :

LENGTH		ANGLE	
0~6.0	±0.05mm	0.	±2.0°
>6~30	±0.10mm	0.0	±1.0°
>30~120	±0.15mm	0.00	±0.50°

C.C.P. (DG) CONTACT PROBES CO., LTD.
東莞中探探針有限公司

The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.