




C.C.P. Contact Probes Co., Ltd

5F, No.8 Lane 24 Ho Ping Rd., Panchiao District, New Taipei City 220, Taiwan R.O.C.
 Tel:+886-2-29612525 Fax:+886-2-29610355 http://www.pccp.com.tw

DE4-051EF23-01F0 Device

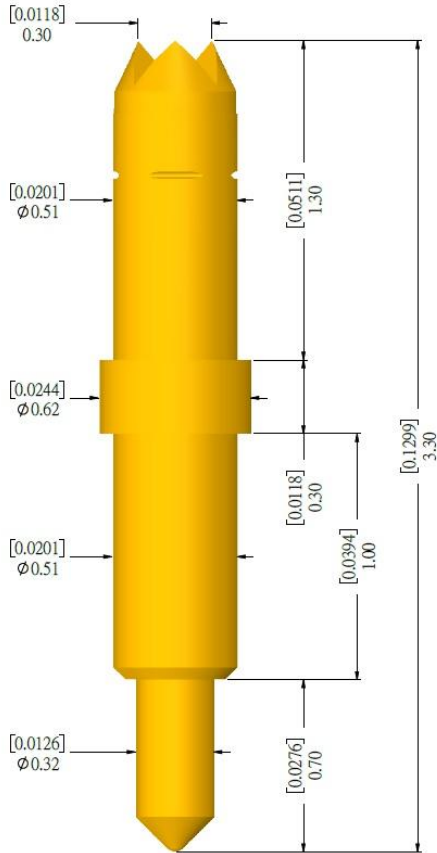

L/B

Material & Finishes

- Device Side Plunger :BeCu alloy with Au plated
- L/B Side Plunger :BeCu alloy with Au plated
- Barrel :Phosphor Bronze alloy with Au plated
- Spring : Music Wire (SWP) with Au plated

Mechanical

- Full Travel : 0.55mm
- Recommended Travel : 0.35mm
- Spring Force : 30g \pm 20% at 0.35mm
- Durability : 200k cycles (minimum)
- Operating Temp. : -15°C~125°C

Electrical Analysis Tools

- Agilent Network Analyzer E5071C
- Tektronix DSA8200
- HFSS, ADS, Q3D, Designer

Electrical Characteristics

- Current Rating : 1A Continuous
- Contact Resistance : <100m Ω (AVG)
- Characteristic Impedance : 46.29 Ω
- Insertion Loss: -1dB>20GHz
- Return Loss: -20dB@8.23GHz
- Time Delay: 19.76psec
- Loop Inductance: 0.91nH
- Capacitance: 0.43pF

