




Please Approve this Drawing

Date	
Signature	

REVISIONS (修正)			
NO. (序号)	DESCRIPTION(描述)	ECN NO.(变更号)	DATE(日期)
A.0	NEW RELEASE	ECN-2201304041	2013.04.23
A.1	Modify: 2.10±0.05 To 2.10±0.10	ECN-2201607001	2016.07.04

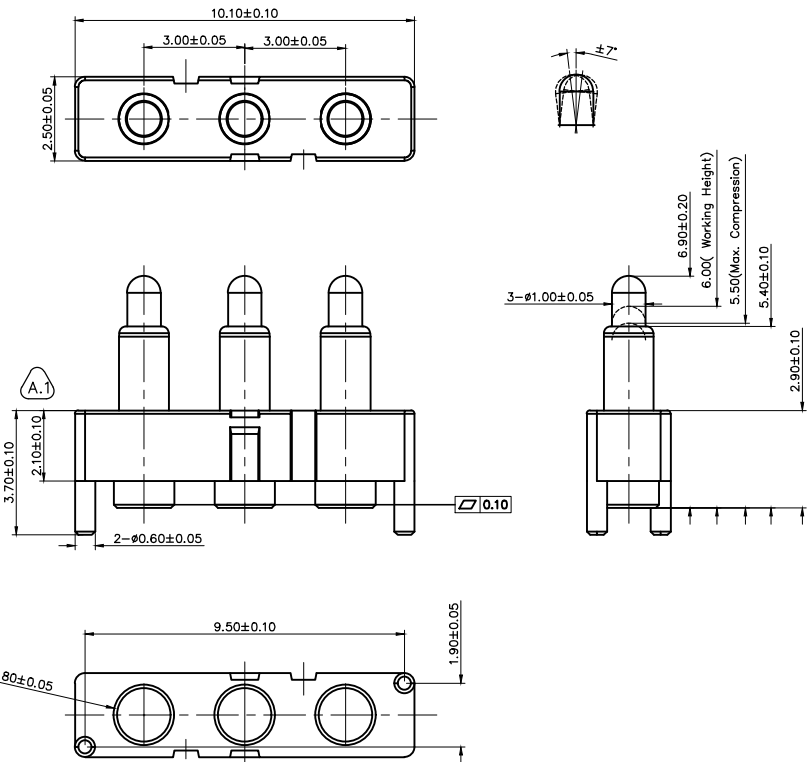

- NOTES:
- Materials:
 - .Housing&Cap: Black HTN (UL94V-0),
 - .Plunger: brass C3604
 - .Barrel: brass C3604
 - .Spring: SUS304
 - Plating:
 - .contact Surface : 10 micro-inch minimum Au over 50~100 micro-inch nickel.
 - Electrical:
 - .Rated current & voltage: DC12V, 1A.
 - .Contact resistance: 50 mohm maximum at working height(quiescence)
 - Mechanical:
 - .Normal force: 100g±20% at working height
 - .Durability: 10,000 cycles(minimum)
 - When the current is greater than 1A then need to increase the time delay circuit(3 second)
 - To ensure the best usage, please operate it based on the working height.
 - .Based on the engineering drawings, shall not exceed the maximum allowed compression.
 - RoHS & HF complied product.

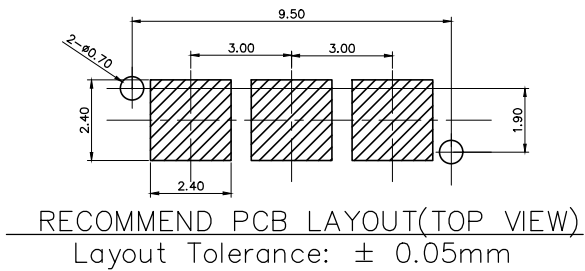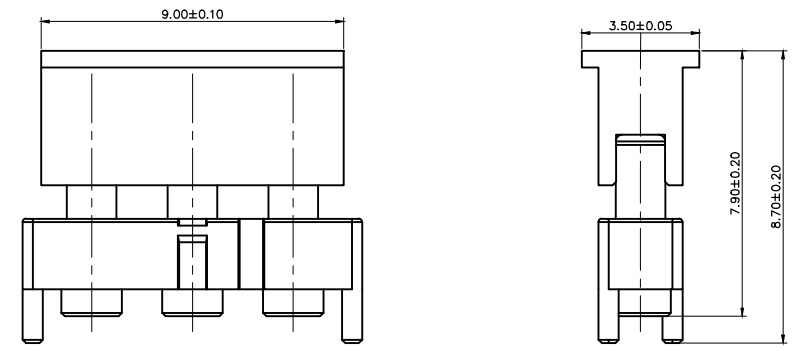

DRAW (设计)	杨茜	SCALE (比例)	10 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	F1767AA01-03A300MR
COUNTER SIGN (会签)		SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	Seeing notes (见备注)
AUDIT (审核)		DATE (日期)	2016.07.04	VER (版次)	A.1	TITLE (品名)	Pogo pin Conn.
APPROVE (核准)		PLATE (镀层)	Seeing notes (见备注)				

THE UNMARKED TOLERANCE ARE AS BELOW :
(未标记的公差)
LENGTH (尺寸)

0~6.0	± 0.05 mm	0.	$\pm 2.0^\circ$
>6~30	± 0.10 mm	0.0	$\pm 1.0^\circ$
>30~120	± 0.15 mm	0.00	$\pm 0.50^\circ$

ANGLE (角度)

C.C.P. (DG) CONTACT PROBES CO.,LTD.
东莞中探探针有限公司

The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.