



Please Approve this Drawing	
Date	
Signature	

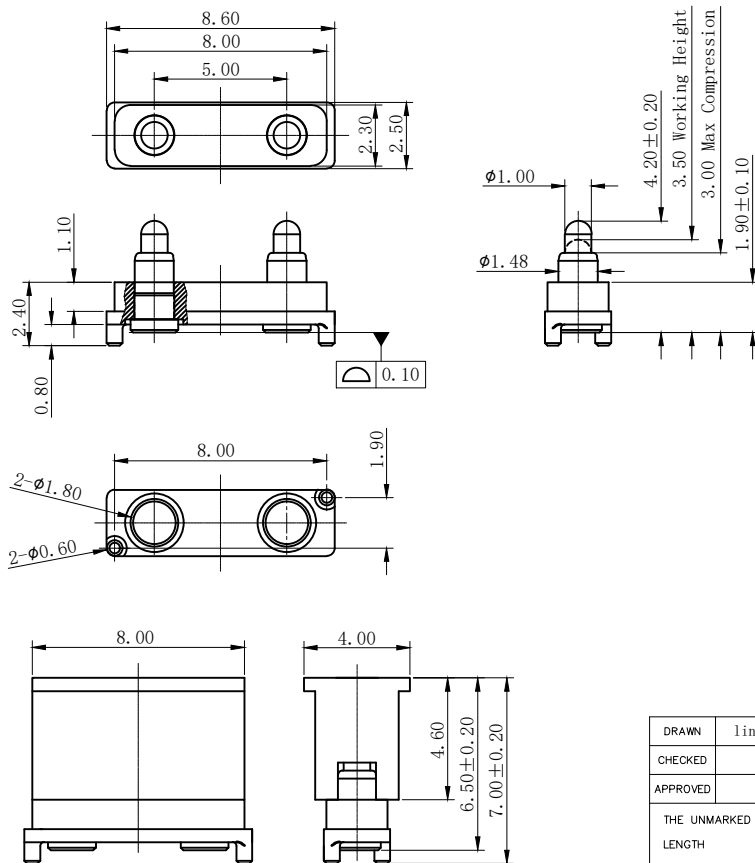

REVISIONS			
NO	DESCRIPTION	ECN NO	DATE
	INITIAL RELEASE	ECN-220130532	2013.05.31

NOTES:

- Materials:
 - .Housing&Cap : Black HTN(UL94V-0)
 - .Plunger: Brass C3604
 - .Barrel: Brass C3604
 - .Spring: SUS304
- Plating:
 - .Contact Surface :10 micro-inch minimum Au over 50~100 micro-inch Ni.
- Electrical
 - .Rated Current & Voltage : DC 12 V ; 1A
 - .Contact Resistance:50 mohm maximum at Working Height(Quiescence)
- Mechanical
 - .Spring Force :100g $\pm$ 20% at Working Height
 - .Durability:10,000 cycles(minimum)
- To avoid arcing issue, The adaptor start to power supply after connector mated fully
- To ensure the best usage, please operate it based on the working Height.
- Based on the Engineering Drawings, shall not exceed the maximum allowed compression.
- RoHs and HF compliant product.

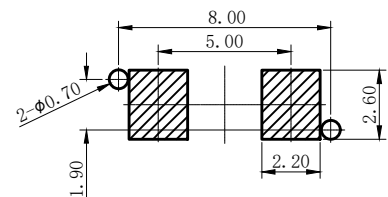

RECOMMEND PCB LAYOUT
Layout Tolerance: $\pm 0.05\text{mm}$

DRAWN	linyushou	SCALE:	5 : 1	UNIT	mm	DRAWING NO.	F969AA01-02A500MR
CHECKED		SHEET:	1 of 1	PROJECT		TITLE:	Pogo Pin Connector
APPROVED		DATE:	2013.05.31	VER.	A.0		
THE UNMARKED TOLERANCE ARE AS BELOW :				C.C.P. (DG) CONTACT PROBES CO.,LTD.			
LENGTH		ANGLE		东莞中探探针有限公司			
0~6.0	$\pm 0.05\text{mm}$	0.	$\pm 2.0^\circ$	The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.			
>6~30	$\pm 0.10\text{mm}$	0.0	$\pm 1.0^\circ$				
>30~120	$\pm 0.15\text{mm}$	0.00	$\pm 0.50^\circ$				