

4

3


2

1

PART No. H003M7-H03A310RR







REVISIONS

LTR	DESCRIPTION	DATE	APPROVED	NOTE
	INITIAL RELEASE	12/27/07'		ECN-07122701
△				
△				
△				

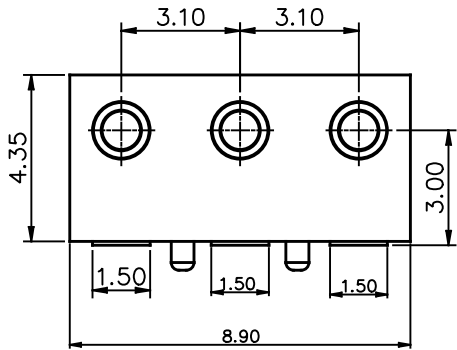

Please Approve this Drawing

Date	
Signature	

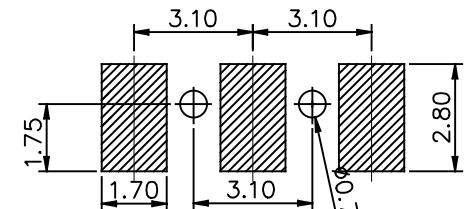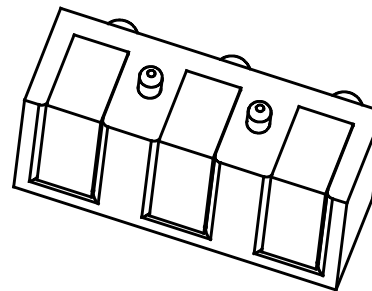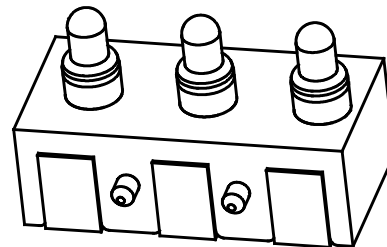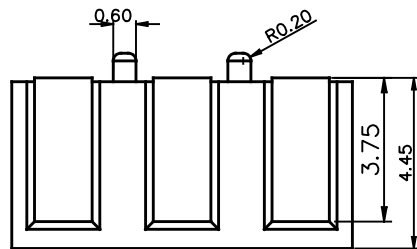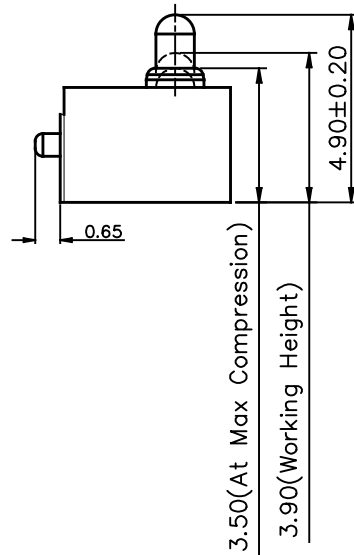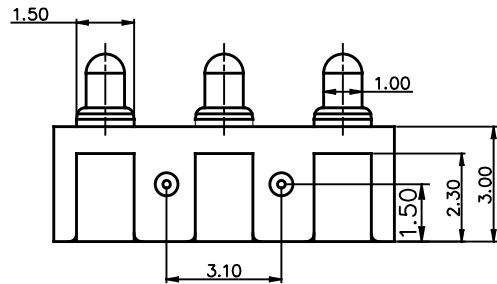

Recommended P.C.B. Layout(Component Side)

NOTE :

- Material
 - Housing: Black HTN+30%GF UL94V-0
 - Plunger & Barrel : Brass
 - Spring : SUS 304
- Plating
 - Contact Surface : 10 μ " minimum Au over 50~100 μ "
- Electrical
 - Rated Current & Voltage : DC 12 V ; 1 A
 - Contact Resistance : 50 Ω m maximum at Working Height. (Quiescence)
- Mechanical
 - Unloaded Height : 4.90 mm
 - Working Height : 3.90 mm
 - Spring Force : 120 g \pm 20% at Working Height
 - Durability : 10,000 cycles (minimum)
- To ensure the best usage, please operate it based on the .Based on engineering drawings, shall not exceed the maximum allowed compression.

DRAWN	SCALE: 2.5 : 1
CHECKED	SHEET: 1 OF 1
APPROVED	DATE: 09/07/07'
<small>DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: DECIMALS ANGLES X \pm .20 \pm 2.0' X.X \pm .10 \pm 1.0' X.XX \pm .05 \pm 0.5'</small>	
<small>THE INFORMATION AND DESIGN DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF C.C.P. CONTACT PROBES CO.,LTD. C.C.P. CONTACT PROBES CO.,LTD. RESERVES ALL PATENT, PROPRIETARY DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THEREOF, AND TO ANY ARTICLE DISCLOSED HEREIN EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE FOREGOING DOES NOT APPLY TO VENDOR PROPRIETARY RIGHTS.</small>	
FILE PATH:	

東莞中探探針有限公司
DG C.C.P. CONTACT PROBES CO.,LTD.

TITLE: Pitch 3.10mm Height 4.9mm
3-Pos Pogo Pin Connector

SIZE A4	DRAWING NO. H003M7-H03A310RR	REV. A0
------------	---------------------------------	------------