REVISIONS (修正)			
NO.（序号）	DESCRIPTION(描述)	ECN NO.(变更号)	DATE(日期)
A.0	NEW RELEASE	ECN-06082301	2016.08.23

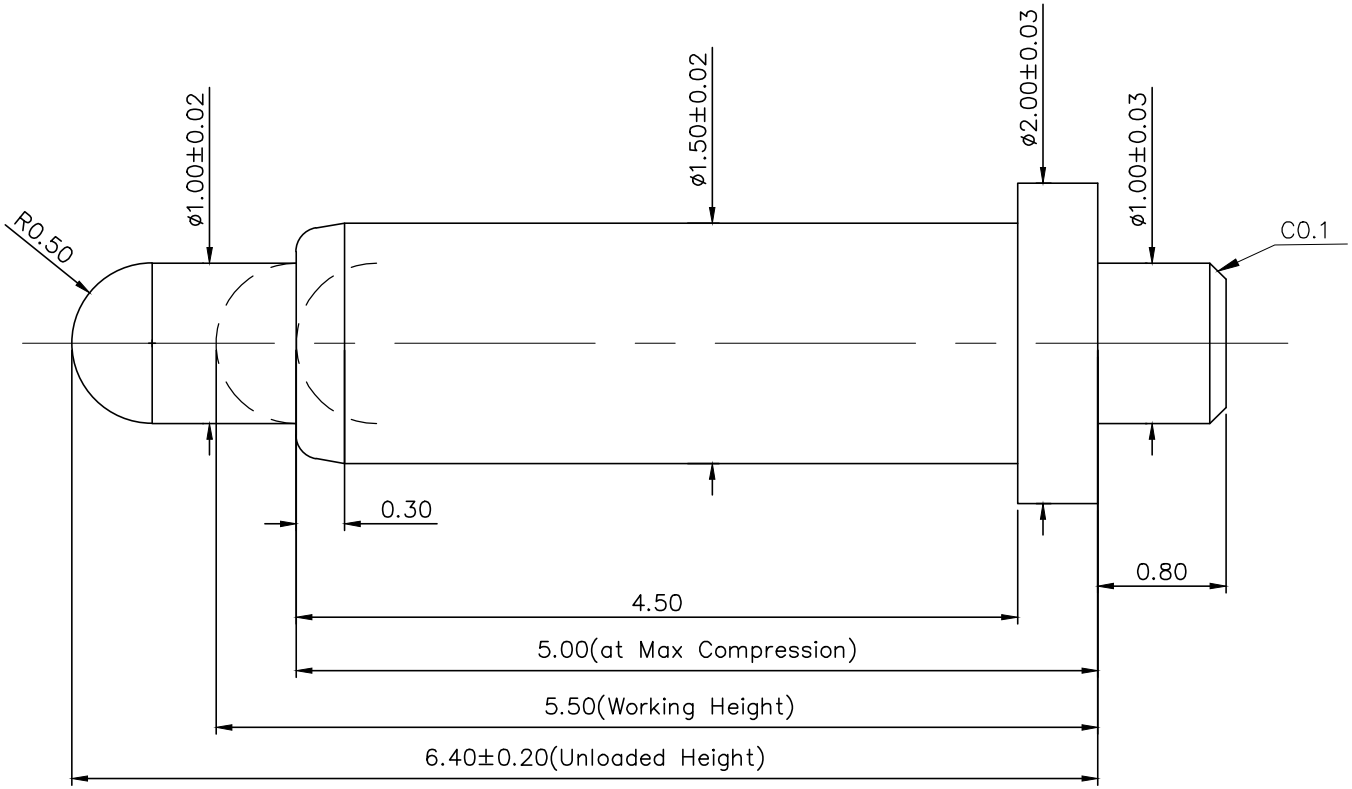

NOTE;

1.Material

Plunger: brass 3604 N103P6-A15

Barrel: brass 3604 H024R0-A15

Spring: SUS 304 H003S0

2.Plating

Plunger: 10 micro-inch minimum Au over 50~100 micro-inch minimum nickel

Barrel : 10 micro-inch minimum Au over 50~100 micro-inch minimum nickel

3.Electrical

Rated current & voltage: DC 12V; 1A.

Contact resistance: 50 mohm maximum at Normal working height(quiescence)

4.Mechanical

Unloaded Height: 6.4mm

Working Height: 5.5mm

Spring force : 100g±20% at working height（0.9mm）

DRAW (设计)	刘灿章	SCALE (比例)	10 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	H024M0
COUNTER SIGN (会签)		SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	Seeing notes（见备注）
AUDIT (审核)		DATE (日期)	2006.08.23	VER (版次)	A.0	TITLE (品名)	Pogo pin
APPROVE (核准)		PLATE (镀层)	Seeing notes(见备注)				

THE UNMARKED TOLERANCE ARE AS BELOW :
(未标记的公差)

LENGTH (尺寸)		ANGLE（角度）	
0~6.0	±0.05mm	0.	±2.0°
>6~30	±0.10mm	0.0	±1.0°
>30~120	±0.15mm	0.00	±0.50°

C.C.P. (DG) CONTACT PROBES CO.,LTD.
东莞中探探针有限公司

The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.