


Please Approve this Drawing	
Date	
Signature	

REVISIONS			
NO.	DESCRIPTION	ECN NO.	DATE
	INITIAL RELEASE	ECN-220120118001	2012.01.18

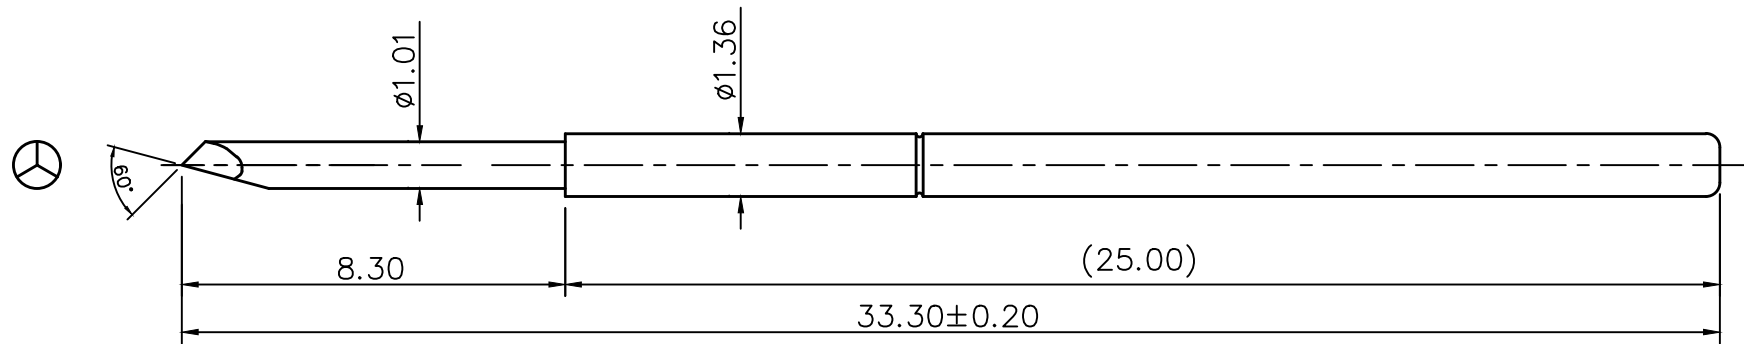

NOTE;

- Material
Plunger: BeCu C1730
Barrel: Brass C3604
Spring: SUS304
- Plating
Plunger: 5 micro-inch minimum Au over 80~120 micro-inch nickel
Barrel: 5 micro-inch minimum Au over 80~120 micro-inch nickel
- Electrical
Rated current : 3A Max.
Contact resistance: 50 mohm maximum at working stroke(quiescence)
- Mechanical
Full stroke: 6.30 mm
Spring Force :100g±20% at 4.20 mm working stroke
Spring force:150g±20% at 6.30 mm stroke(reference)
Durability: 100,000 cycles(minimum)
- RoHS&HF compliant product.

DRAWN	LinYushou	SCALE:	1 : 1	UNIT	mm	DRAWING NO.	P-25T-0515
CHECKED		SHEET:	1 of 1	PROJECT		TITLE: Test Probe	
APPROVED		DATE:	2012.01.18	VER.	A.0		
THE UNMARKED TOLERANCE ARE AS BELOW :				C.C.P. (DG) CONTACT PROBES CO.,LTD. 东莞中探探针有限公司 The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.			
LENGTH		ANGLE					
0~6.0	±0.05mm	0.	±2.0°				
>6~30	±0.10mm	0.0	±1.0°				
>30~120	±0.15mm	0.00	±0.50°				