


REVISIONS (修正)			
NO. (序号)	DESCRIPTION(描述)	DCN NO.(变更号)	DATE(日期)
D.0	NEW RELEASE	DCN-201809127	2018.10.08

Please Approve this Drawing	
Date	
Signature	

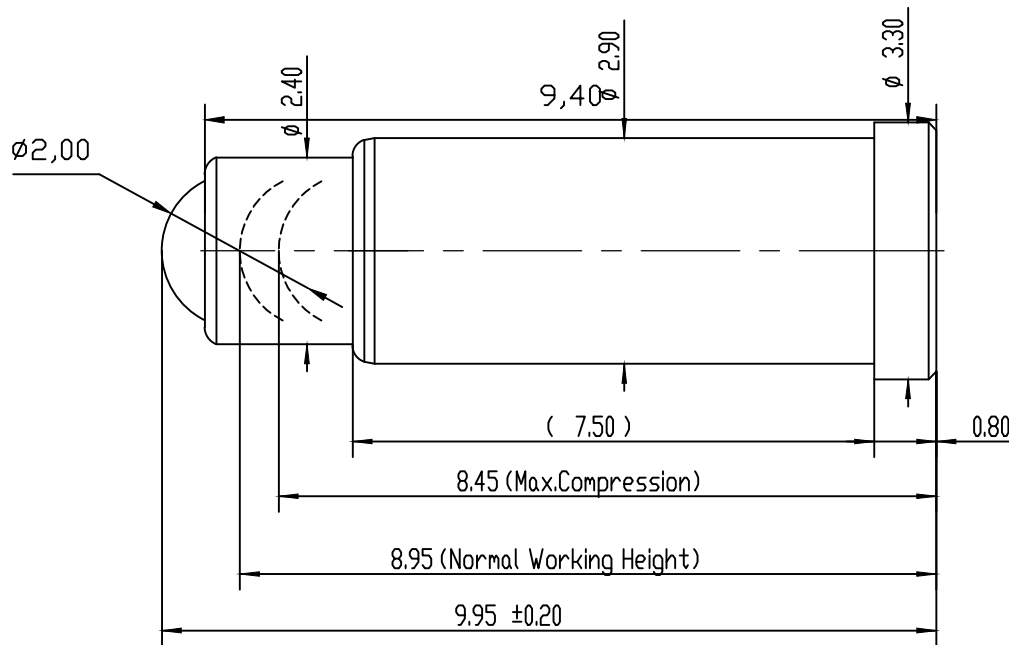

NOTE:

- Material
 - Plunger: Brass
 - Barrel: Brass
 - Spring: SUS
 - Ball: Brass
- Plating
 - Plunger: 10 micro-inch minimum Au over 50~120 micro-inch nickel
 - Barrel: 10 micro-inch minimum Au over 50~120 micro-inch nickel
 - Ball: 5 microinch minimum Pd over 30 microinch minimum PdNi over 40~80 microinch Ni
- Electrical
 - Rated current & voltage@C12V; 1A
 - Contact resistance: 100 mohm maximum at working height(quiescence)
- Mechanical
 - Spring force: 90±20g at Normal working height
 - Durability: 10,000 cycles(minimum)
- To ensure the best usage, please operate it based on the working height. Based on the engineering drawings, shall not exceed the maximum allowed compression
- RoHS & HF complied product.

仅限验证

DRAW (设计)	徐彬泉	SCALE (比例)	10:1	UNIT (单位)	mm	DRAWING NO. (图号)	P07404FP3
COUNTER SIGN (会签)	N/A	SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	Seeing notes(见备注)
AUDIT (审核)	肖大庭	DATE (日期)	2018/10/10	VER (版本)	D.0	TITLE (品名)	Pogo pin Conn.
APPROVE (批准)	肖大庭	PLATE (镀层)	Seeing notes(见备注)				

THE UNMARKED TOLERANCE ARE AS BELOW :

LENGTH (尺寸)	TOLERANCE	ANGLE (角度)	TOLERANCE
0~6.0	±0.05mm	0.0	±2.0°
>6~30	±0.10mm	0.0	±1.0°
>30~120	±0.15mm	0.00	±0.50°

C.C.P. (DG) CONTACT PROBES CO.,LTD.
 东莞中探探针有限公司
 The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission