


Please Approve this Drawing

Date	
Signature	

REVISIONS (修正)			
NO. (序号)	DESCRIPTION(描述)	DCN NO.(变更号)	DATE(日期)
D.0	NEW RELEASE	DCN-201811009	2018.11.05
D.1	依客户要求变更弹力、尾部结构	DCN-201902049	2019.02.22

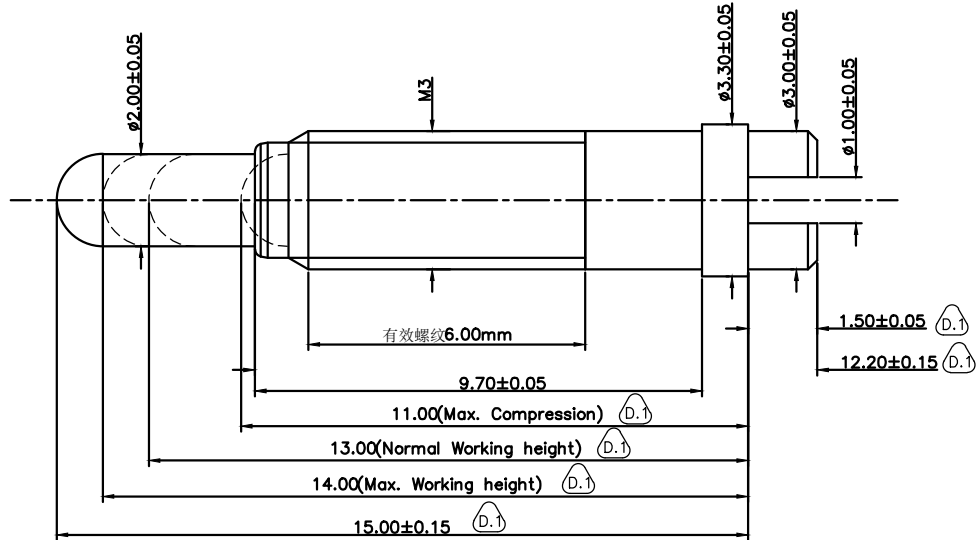

NOTE;

- Material
  - Plunger: brass
  - Barrel: brass
  - Spring&Ball: SUS
- Plating
  - Plunger: 20 micro-inch minimum Au over 50~120 micro-inch nickel
  - Barrel : 20 micro-inch minimum Au over 50~120 micro-inch nickel
- Electrical
  - Rated current & voltage: DC12V; 1A.
  - Contact resistance: 50 mohm maximum at working height(quiescence)
- Mechanical
  - Spring force: 250g ± 20g at Normal working height (D.1)
  - Durability: 10,000 cycles (minimum)
- To ensure the best usage, please operate it based on the working height Based on the engineering drawings, shall not exceed the maximum allowed compression
- RoHS & HF complied product.

DRAW (制图)	何燕坤	SCALE (比例)	10 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	P07417PH1
COUNTER SIGN (会签)		SHEET (张数)	1 of 1	PROJECT (项目编号)		MATERIAL (材质)	Seeing notes (见备注)
AUDIT (审核)	周亮	DATE (日期)	2019.02.22	VER (版本)	D.1	TITLE (品名)	Pogo pin
APPROVE (核准)	肖大庭	PLATE (版后)	Seeing notes (见备注)				
THE UNMARKED TOLERANCE ARE AS BELOW : (未标记的公差) LENGTH (尺寸)				ANGLE (角度)			
0~6.0	±0.05mm	0.	±2.0°				
>6~30	±0.10mm	0.0	±1.0°				
>30~120	±0.15mm	0.00	±0.5°				
				C.C.P. (DG) CONTACT PROBES CO.,LTD. 东莞中探探针有限公司			
The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.							