


Please Approve this Drawing

Date	
Signature	

REVISIONS (修正)			
NO. (序号)	DESCRIPTION(描述)	DCN NO.(变更号)	DATE(日期)
D.0	NEW RELEASE		2019.03.14

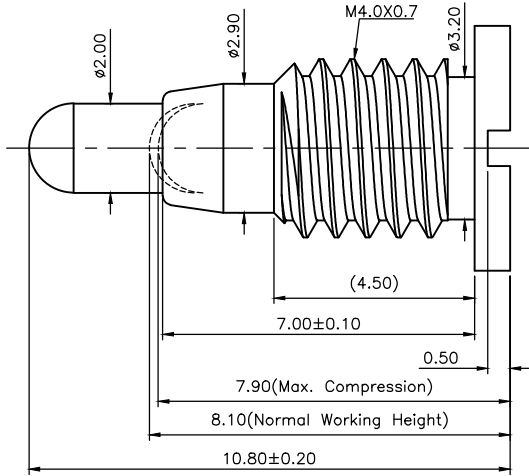

NOTE;

- Material
Plunger: brass
Barrel: QSN
Spring: SUS
- Plating
Plunger: 10 micro-inch minimum Au over 50~120 micro-inch nickel
Barrel : 10 micro-inch minimum Au over 50~120 micro-inch nickel
- Electrical
Rated current & voltage: DC12V; 2A.
Contact resistance: 50 mohm maximum at working height(quiescence)
- Mechanical
Spring force: 120g \pm 20% at Normal working height
Durability: 10,000 cycles(minimum)
- To ensure the best usage, please operate it based on the working height. Based on the engineering drawings, shall not exceed the maximum allowed compression
- RoHS & HF complied product.

DRAW (制图)	Hendy	SCALE (比例)	10 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	P07652FH1
COUNTER SIGN (会签)		SHEET (张数)	1 of 1	PROJECT (项目编号)		MATERIAL (材质)	Seeing notes (见备注)
AUDIT (审核)		DATE (日期)	2019.03.14	VER (版本)	D.0	TITLE (品名)	Screw Pogo pin
APPROVE (核准)		PLATE (版号)	Seeing notes(见备注)				
THE UNMARKED TOLERANCE ARE AS BELOW : (未标记的公差) LENGTH (尺寸)						C.C.P. (DG) CONTACT PROBES CO.,LTD. 东莞中探探针有限公司	
0~6.0	± 0.05 mm	0.	$\pm 2.0^\circ$	The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.			
>6~30	± 0.10 mm	0.0	$\pm 1.0^\circ$				
>30~120	± 0.15 mm	0.00	$\pm 0.5^\circ$				