
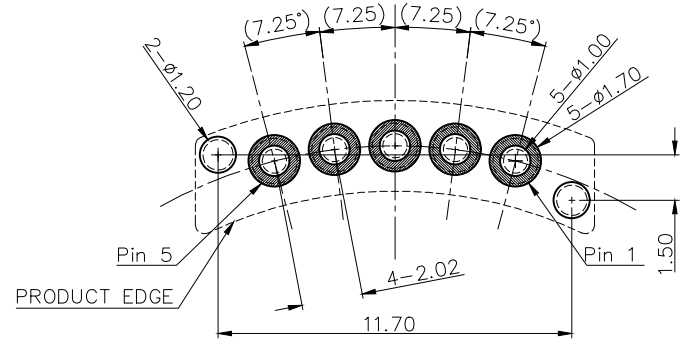
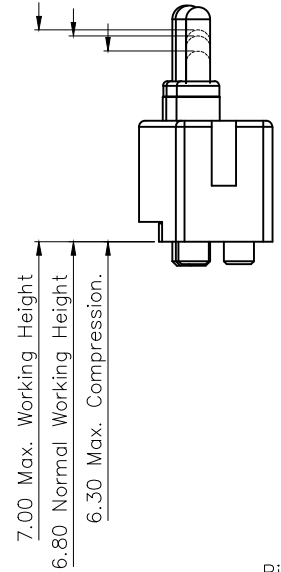


REVISIONS(修正)			
NO. (序号)	DESCRIPTION(描述)	ECN NO.(变更号)	DATE(日期)
A.0	INITIAL RELEASE	ECN-2201509003	2015.09.02


- NOTES:
- Materials:
 - .Housing&Cap: High Temperature Polyester(UL94V-0),BLACK
 - .Plunger&Barrel: Brass
 - .Spring: SWP
 - Plating:
 - .Plunger :0.5um(20u") minimum Au over 3um(120u")minimum Ni
 - .Barrel : 0.5um(20u") minimum Au over 3um(120u")minimum Ni
 - Electrical
 - .Rated Current & Voltage : DC 12V ; 2.0A Max
 - Mechanical
 - .Spring Force: 30g±10g at Normal Working Height
 - .Durability: 20,000 cycles(minimum)
 - To avoid arcing issue, The adaptor start to power supply after connector mated fully
 - To ensure the best usage, please operate it based on the working Height. Based on the Engineering Drawings, shall not exceed the maximum allowed compression.
 - Harmful material control please follow DOC. NO."DQ03050 "
 - Reflow after need to meet the product specification

Please Approve this Drawing

Date	
Signature	

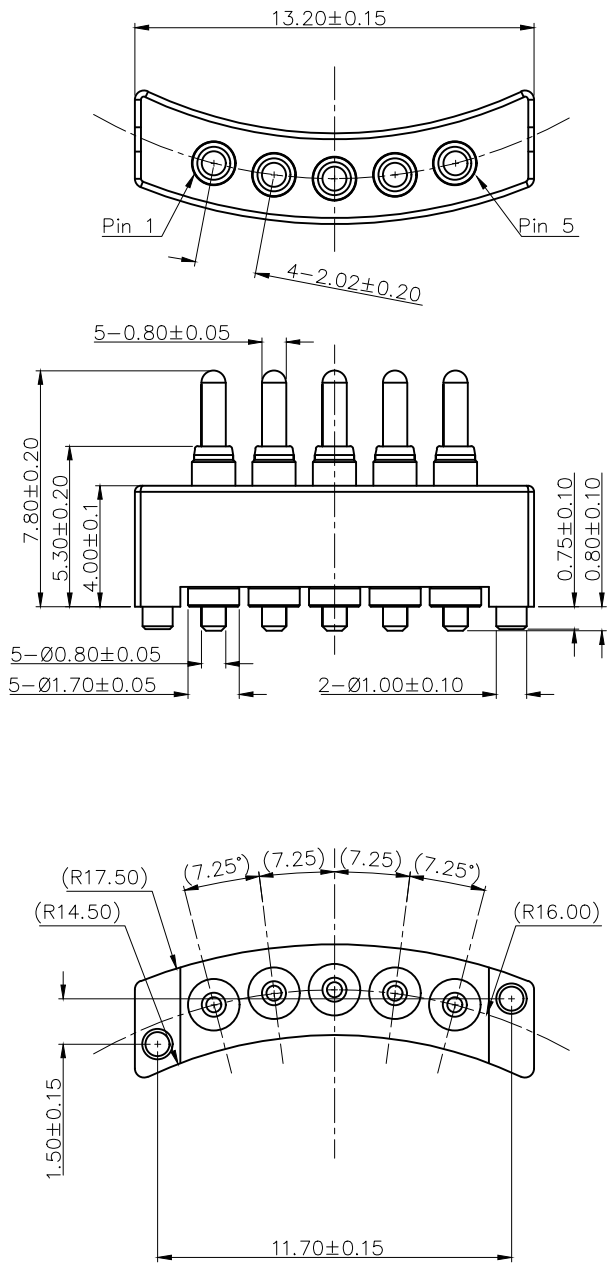

RECOMMEND PCB LAYOUT(TOP VIEW)
Layout Tolerance: ±0.05

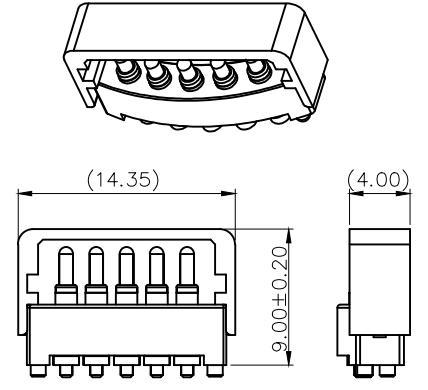

CACLE 1 : 2

DRAWN (设计)	车 澈	SCALE (比例)	4 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	P2698MP03-05A202MR
CHECKED (确认)		SHEET (页数)	1 of 1	PROJECT (视图)		TITLE (品名)	5Pin Pogo Pin connector
APPROVED (核准)		DATE (日期)	2015.09.02	VER. (版本)	A.0		
THE UNMARKED TOLERANCE ARE AS BELOW : (未标记的公差) LENGTH (尺寸)				ANGLE (角度)			
0~6.0	±0.05mm	0.	±2.0°				
>6~30	±0.10mm	0.0	±1.0°				
>30~120	±0.15mm	0.00	±0.50°				
				C.C.P. (DG) CONTACT PROBES CO.,LTD. 东莞中探探针有限公司			
The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.							