

4


3

2

1



REVISIONS(修正)

NO. (序号)	DESCRIPTION(描述)	ECN NO.(变更号)	DATE(日期)
A.0	INITIAL RELEASE	ECN-201503118	2015.12.04

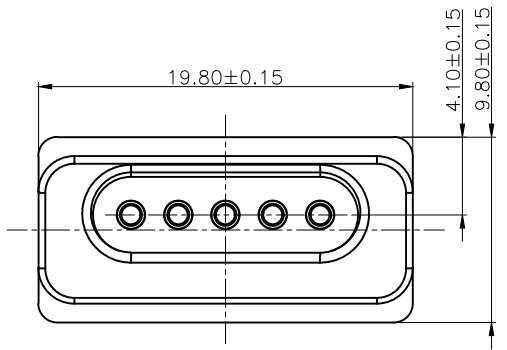



Please Approve this Drawing

Date	
Signature	

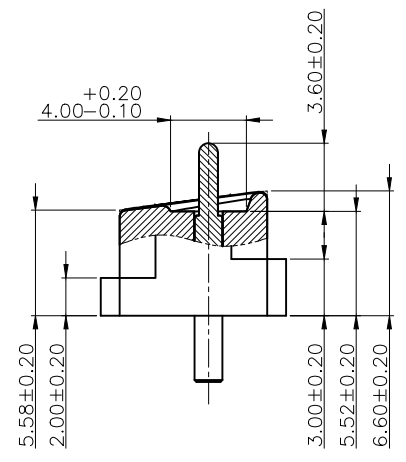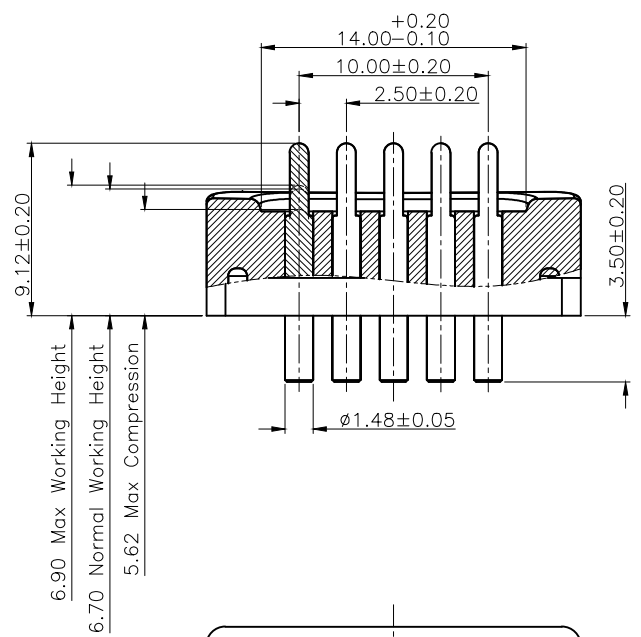

NOTES:

- Materials:
 - .Housing&Cap: High Temperature Polyester(UL94V-0),BLACK
 - .Plunger&Barrel: Brass
 - .Spring:SUS 304
- Plating:
 - .Plunger :10 micro-inch minimum Au over 50~100 micro-inch Ni
 - .Barrel :10 micro-inch minimum Au over 50~100 micro-inch Ni
- Electrical
 - .Rated Current & Voltage : DC 12V ; 1.0A Max
- Mechanical
 - .Spring Force: 100g±20g at Normal Working Height
 - .Durability:10,000 cycles(minimum)
- To avoid arcing issue, The adaptor start to power supply after connector mated fully
- To ensure the best usage, please operate it based on the working Height. Based on the Engineering Drawings, shall not exceed the maximum allowed compression.
- Harmful material control please follow DOC. NO. "DQ03050"

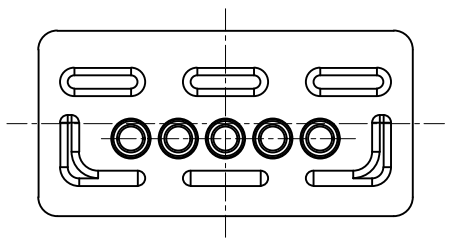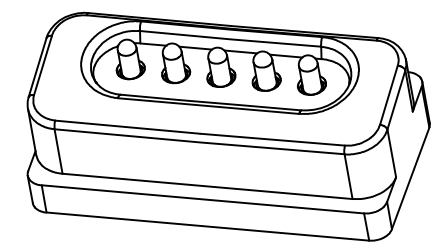

DRAWN (设计)	潘红	SCALE (比例)	4 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	P3117MF01-05U250HT
CHECKED (确认)		SHEET (页数)	1 of 1	PROJECT (视图)		TITLE (品名)	5Pin Pogo Pin connector
APPROVED (核准)		DATE (日期)	2015.12.04	VER. (版本)	A.0		
THE UNMARKED TOLERANCE ARE AS BELOW :							
LENGTH (尺寸)		ANGLE (角度)					
0~6.0	±0.05mm	0.	±2.0°				
>6~30	±0.10mm	0.0	±1.0°				
>30~120	±0.15mm	0.00	±0.50°				
				C.C.P. (DG) CONTACT PROBES CO.,LTD. 东莞中探探针有限公司			
The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.							

4

3

4

2

1