


Please Approve this Drawing

Date

Signature

REVISIONS (修正)			
NO. (序号)	DESCRIPTION(描述)	ECN NO.(变更号)	DATE(日期)
A.0	NEW RELEASE	ECN-2201606031	2016.06.28

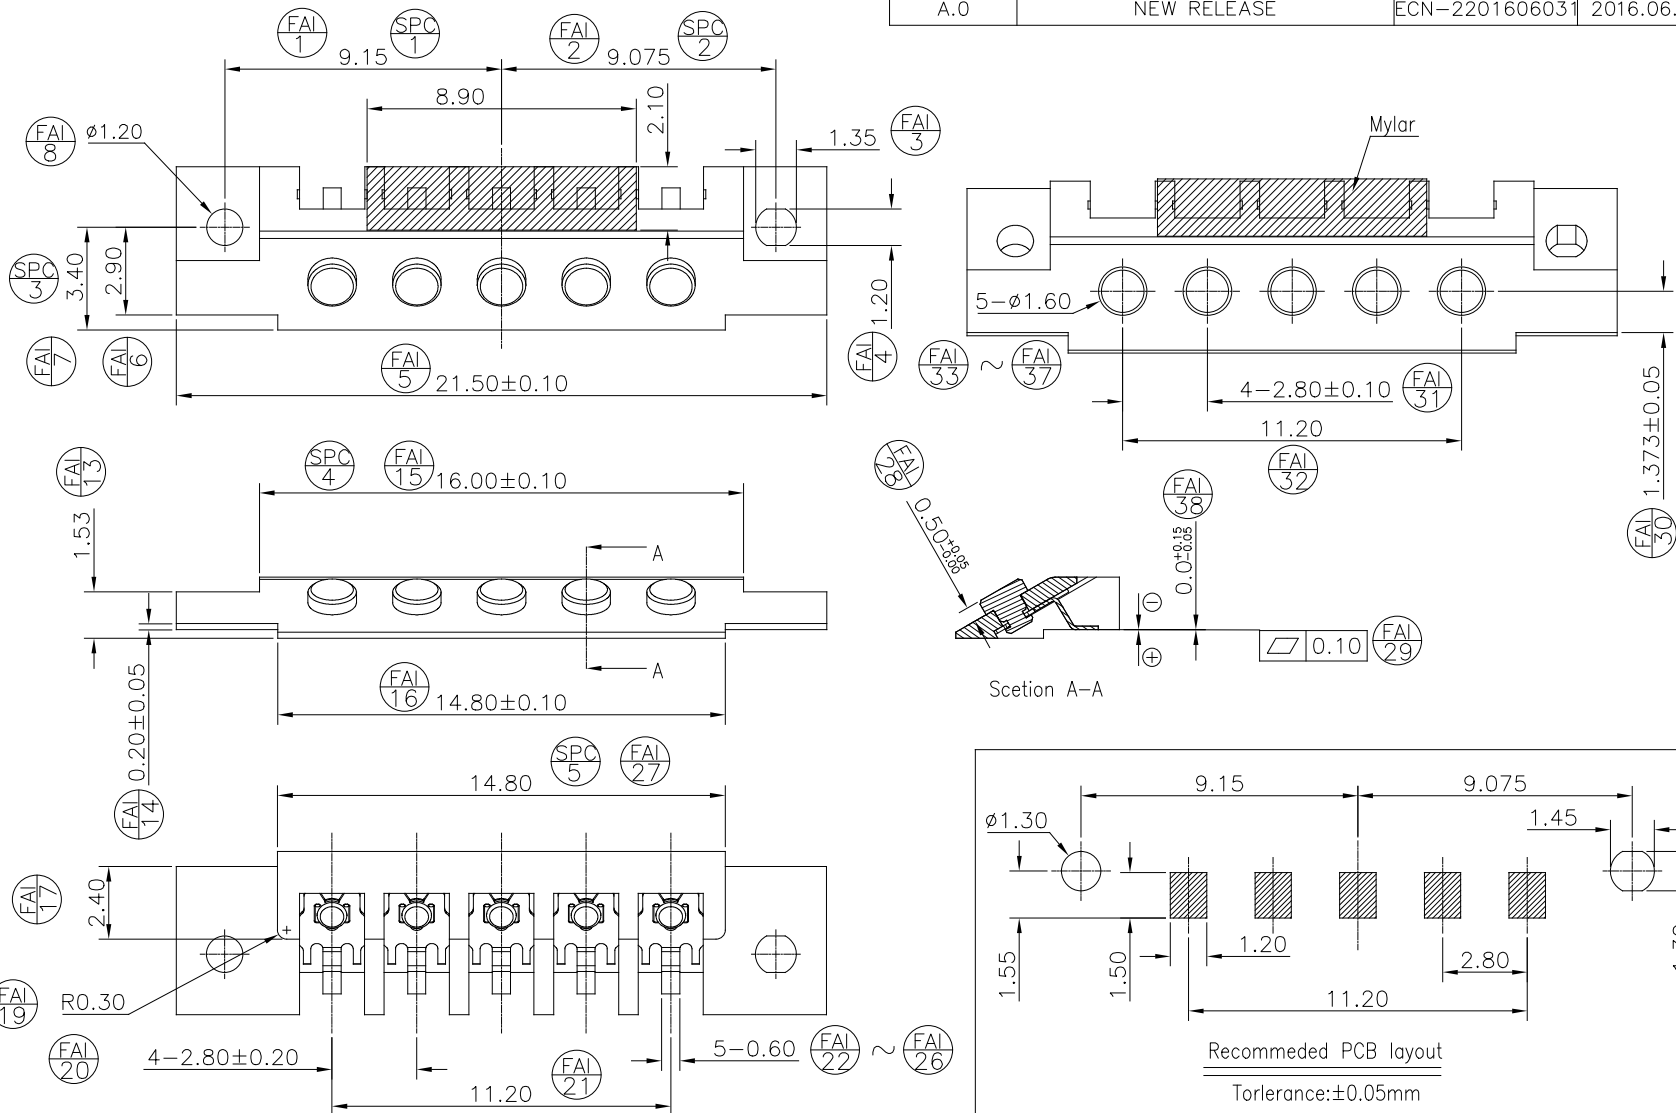

NOTES:

- Materials:
 - .Housing: PA6T,Black
 - .Terminal: C5210 ,T=0.12mm
 - .Pin:Brass C3604
 - .Mylar: Mylar 0.10T
- Plating:
 - .Terminal: 1 micro-inch minimum Au over 80 micro-inch minimum nickel.
 - .Pin : 12 micro-inch minimum Pd over 80 micro-inch minimum nickel.
- Electrical:
 - .Rated current & voltage: DC5V, 1.2A.
 - .Contact resistance: 30 mohm (initial),50 mohm(after use)
 - .Insulation resistance:100 Mohm by 500V DC.
- Environmental characteristics:
 - .Operating temperature:-20°~+80°C
 - .Harmful material control please follow DOC. NO."DQ03050"

DRAW (设计)	Henry	SCALE (比例)	4 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	P3259FS02-05A280HR			
CHECK (校对)		SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	Seeing notes (见备注)			
AUDIT (审核)		COUNTER SIGN (会签)					DATE (日期)	2016.06.28	REV	A.0
APPROVE (核准)		PLATE (镀层)	Seeing notes(见备注)				TITLE (品名)	5 Pin Female Connector		

THE UNMARKED TOLERANCE ARE AS BELOW :
(未标记的公差)

LENGTH (尺寸)	TOLERANCE	ANGLE (角度)	TOLERANCE
0~6.0	±0.05mm	0.	±2.0°
>6~30	±0.10mm	0.0	±1.0°
>30~120	±0.15mm	0.00	±0.50°

C.C.P. (DG) CONTACT PROBES CO.,LTD.

东莞中探探针有限公司

The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.