
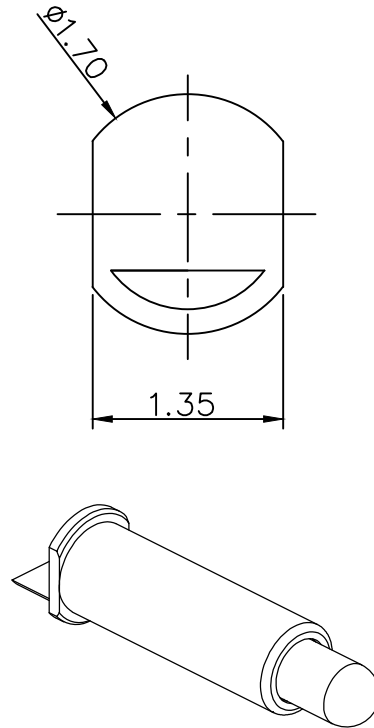


Please Approve  
This Drawing

Date	
Signature	

REVISIONS			
No.	DESCRIPTION	ECN No.	DATE
	INITIAL RELEASE	ECN-2201601005	2016.01.06

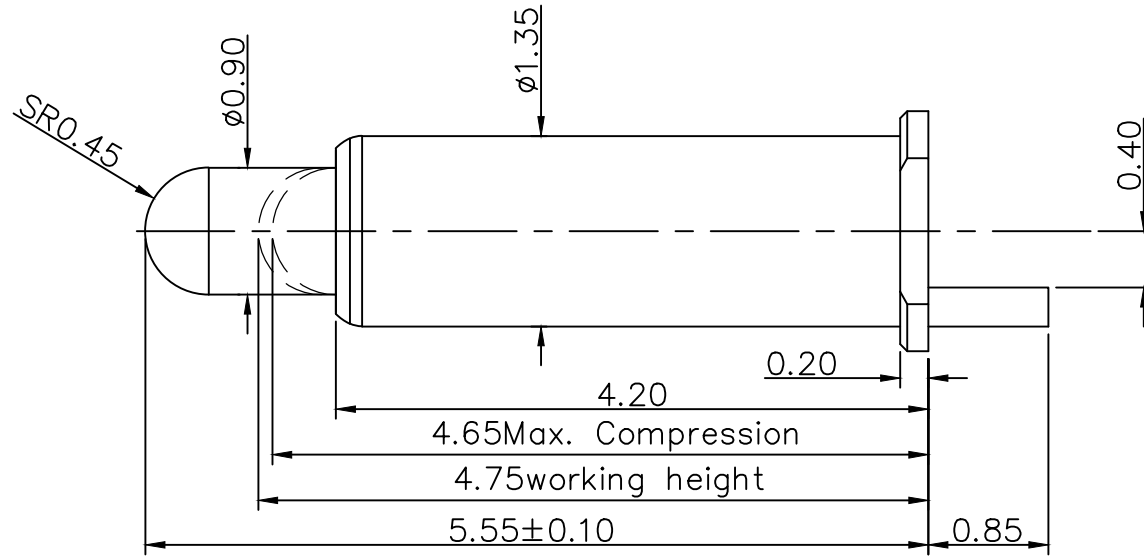

NOTE;  
 1.Material  
 Ball: SUS  
 Barrel & Plunger: Brass  
 Spring: SUS Insulation coating  
 2.Plating  
 Plunger: 15 microinch Min. Au over 50~100 microinch Ni  
 Barrel: 15 microinch Min. Au over 50~100 microinch Ni  
 3.Electrical  
 Rated current & voltage: DC 20V; 5A Max.  
 Contact resistance: 50 mohm Max. at working height(quiescence)  
 4.Mechanical  
 Spring force: 100g±20% at working height(quiescence).  
 Durability: 10,000 cycles(minimum)  
 5.To ensure the best usage,please operate it based on the working height.  
 6.Harmful material control please follow DOC. NO."DQ03050"

DRAWN	linyushou	SCALE:	10 : 1	UNIT	mm	DRAWING NO.	P3730SH02
CHECKED		SHEET:	1 of 1	PROJECT		TITLE:	
APPROVED		DATE:	2016.01.06	VER.	A.0	Pogo Pin	
THE UNMARKED TOLERANCE ARE AS BELOW :				C.C.P. (DG) CONTACT PROBES CO.,LTD.			
LENGTH		ANGLE		东莞中探探针有限公司			
0~6.0	±0.05mm	0.	±2.0°	The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.			
>6~30	±0.10mm	0.0	±1.0°				
>30~120	±0.15mm	0.00	±0.50°				