
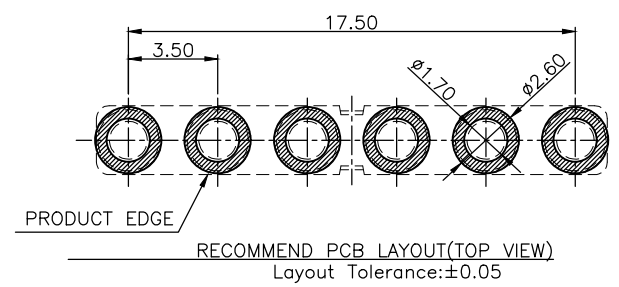


REVISIONS (修正)			
NO. (序号)	DESCRIPTION(描述)	ECN NO.(变更号)	DATE(日期)
A.0	NEW RELEASE	ECN-2201605016	2016.05.20

Please Approve this Drawing

Date	
Signature	

- NOTES:
- Materials:
 - .Housing: High Temperature Polyester(UL94V-0),Black
 - .Plunger&Barrel: Brass
 - .Spring&Ball:SUS
 - Plating:
 - .Plunger :10 micro-inch minimum Au over 50~100 micro-inch nickel
 - .Barrel :10 micro-inch minimum Au over 50~100 micro-inch nickel
 - Electrical
 - .Rated Current & Voltage : DC 12V ; 5A Max
 - .Contact resistance:50 mohm maximum at working height(quiescence)
 - Mechanical
 - . Spring Force: 100g±20g at Normal Working Height
 - .Durability:10,000 cycles(minimum)
 - To avoid arcing issue, The adaptor start to power supply after connector mated fully
 - To ensure the best usage, please operate it based on the working Height. Based on the Engineering Drawings, shall not exceed the maximum allowed compression.
 - .Harmful material control please follow DOC. NO. "DQ03050"

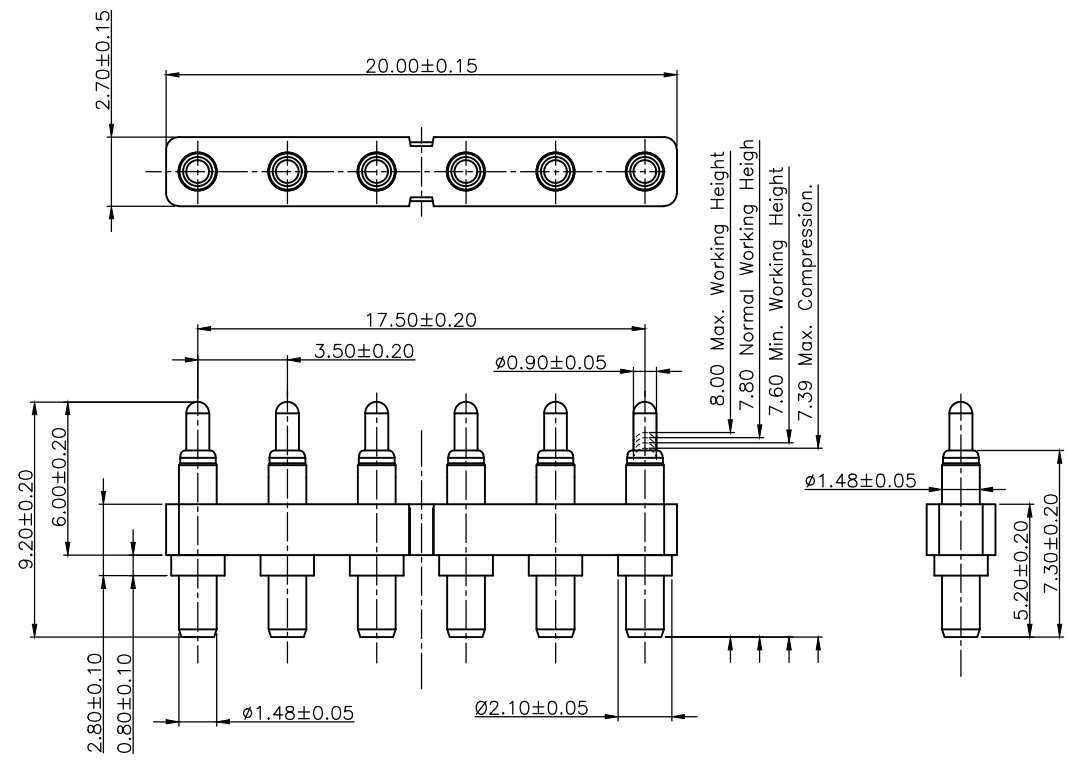

DRAW (设计)	Yangxi	SCALE (比例)	10 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	P3783MP01-06L350MR
CHECK (校对)		SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	Seeing notes (见备注)
AUDIT (审核)		DATE (日期)	2016.05.20	REV.	A.0	TITLE (品名) Pogo pin Conn.	
APPROVE (核准)		PLATE (镀层)	Seeing notes(见备注)				

THE UNMARKED TOLERANCE ARE AS BELOW :
(未标记的公差)

LENGTH (尺寸)		ANGLE (角度)	
0~6.0	±0.05mm	0.	±2.0°
>6~30	±0.10mm	0.0	±1.0°
>30~120	±0.15mm	0.00	±0.50°

C.C.P. (DG) CONTACT PROBES CO.,LTD.
东莞中探探针有限公司

The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.