


4

3



2

1

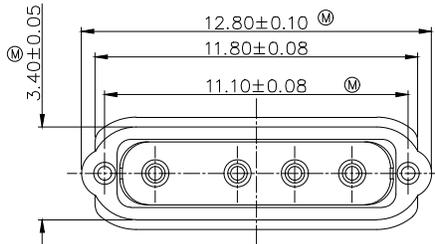


Please Approve this Drawing

Date	
Signature	

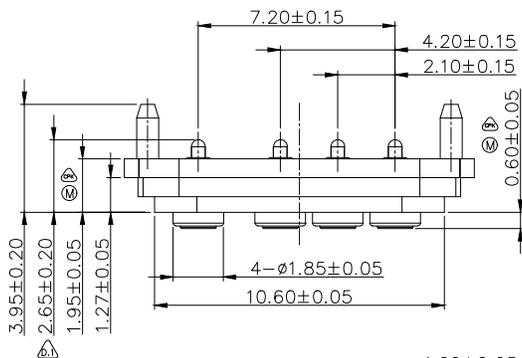


2.25 Max Working Height
2.15 Normal Working Height
2.05 Max. Compression

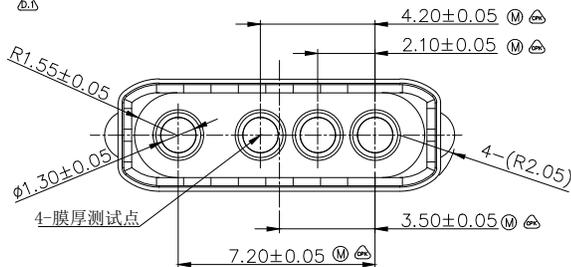

REVISIONS (修正)			
NO. (序号)	DESCRIPTION (描述)	ECN NO.(变更号)	DATE(日期)
A.0	NEW RELEASE	ECN-2201606013	2016.06.13
A.1	修改产品电镀规格	ECN-2201608023	2016.08.13
A.2	修改产品针管壁厚	ECN-2201610017	2016.10.31

备注:

- 材质:
.胶芯: PPS(1104A6)+40%GF,UL94V-0 ,白色;
.针轴: 黄铜C3604&针管: 锡青铜QSn4-3 Y&后盖: SUS 316F
.弹簧: 不锈钢304,防水胶
- 电镀:
针轴: 镀镍50~100 micro-inch 后最少镀金10 micro inch
针管: 镀镍100~150 micro-inch 后最少镀金10 micro inch
- 电气特性
电压&电流: 直流电12伏1.5安
接触阻抗: 在工作高度时最大阻抗350毫欧 (静态)
- 机械特性
.弹力: 在工作高度的弹力80g±20g
.寿命: 10,000次(最少)
为了确保产品的最佳性能,请在正常工作范围内使用
根据工程图纸,不得超过允许的最大压缩行程使用
- 有害物质管控请遵循文件NO. "DQ03050"
- 防水等级PX7.
- 建议二次密封胶零件与产品配合为 ± 0.02 (间隙-0.02~干涉+0.03)
- 标有Ⓜ为重点管控尺寸,标有Ⓜ为CPK管控尺寸.

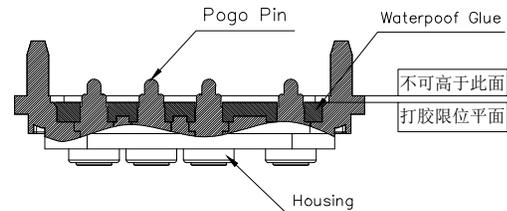

DRAW (设计)	John_Pan	SCALE (比例)	5 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	P5320MF01-04A210HT
COUNTER SIGN (会签)		SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	Seeing notes (见备注)
AUDIT (审核)		DATE (日期)	2016.10.31	VER (版次)	A.2	TITLE (品名)	4Pin Waterproof Connector For Base
APPROVE (核准)		PLATE (版位)	Seeing notes(见备注)				

THE UNMARKED TOLERANCE ARE AS BELOW :
(未标记的公差)
LENGTH (尺寸)

0~6.0	±0.05mm	0.	±2.0°
>6~30	±0.10mm	0.0	±1.0°
>30~120	±0.15mm	0.00	±0.50°

C.C.P. (DG) CONTACT PROBES CO.,LTD.
东莞中探探针有限公司

The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.

4

3

2

1