


Please Approve this Drawing

Date	
Signature	

REVISIONS (修正)			
NO. (序号)	DESCRIPTION (描述)	ECN NO. (变更号)	DATE (日期)
A.0	NEW RELEASE	ECN-2201703020	2017.03.20

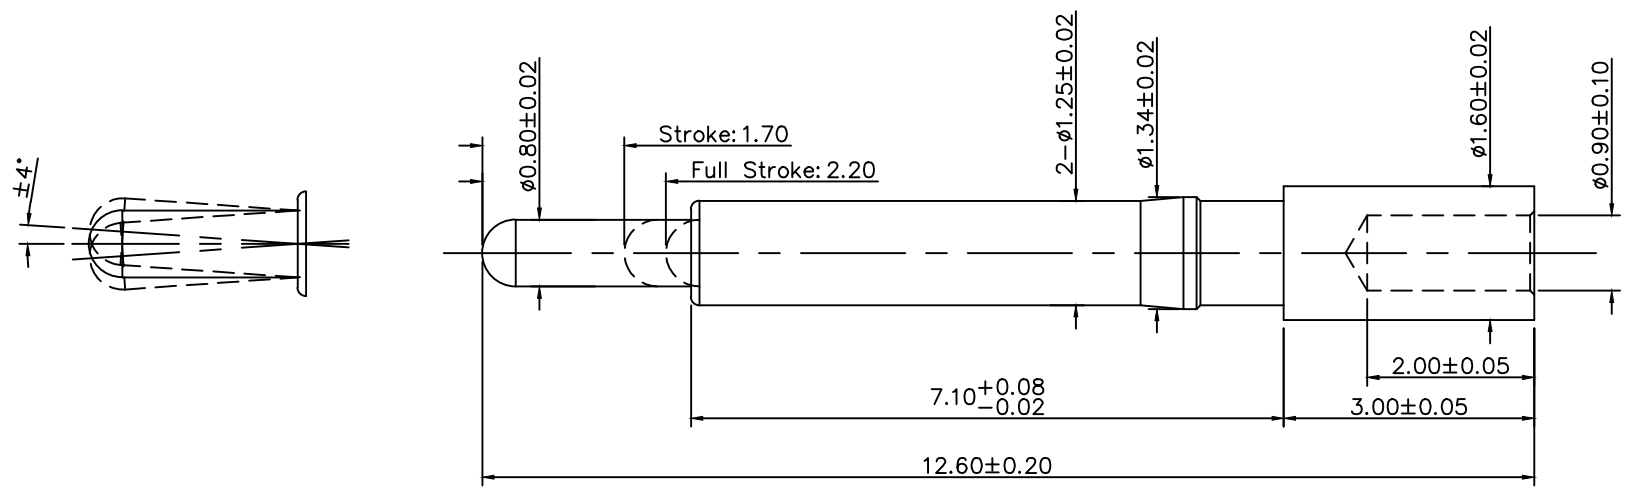

- NOTE;
- Material  
Plunger: brass  
Barrel: brass  
Spring: SUS
  - Plating  
Plunger: 50 micro-inch minimum Au over 50 micro-inch minimum nickel  
Barrel: 10 micro-inch minimum Au over 50 micro-inch minimum nickel
  - Electrical  
Rated current & voltage: DC12V; 1A.  
Contact resistance: 100 mohm maximum at working height(quiescence)
  - Mechanical  
Spring force: 80g±20% at 1.70 Stroke  
Durability: 10,000 cycles(minimum)
  - To ensure the best usage, please operate it based on the working height Based on the engineering drawings, shall not exceed the maximum allowed compression
  - Harmful material control please follow DOC. NO. "DQ03050"

DRAW (设计)	Yangxi	SCALE (比例)	10 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	P5773PH02		
CHECK (校对)		SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	Seeing notes (见备注)		
AUDIT (审核)		COUNTER SIGN (会签)				DATE (日期)	2017.03.20	REV	A.0
APPROVE (核准)		PLATE (镀层)	Seeing notes (见备注)			TITLE (品名)	Pogo pin		

THE UNMARKED TOLERANCE ARE AS BELOW :  
(未标记的公差)

LENGTH (尺寸)		ANGLE (角度)	
0~6.0	±0.05mm	0.	±2.0°
>6~30	±0.10mm	0.0	±1.0°
>30~120	±0.15mm	0.00	±0.50°

C.C.P. (DG) CONTACT PROBES CO.,LTD.  
东莞中探探针有限公司

The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.