




# C.C.P. Contact Probes Co., Ltd

5F, No.8 Lane 24 Ho Ping Rd., Panchiao District, New Taipei City 220, Taiwan R.O.C.  
 Tel:+886-2-29612525 Fax:+886-2-29610355 http://www.pccp.com.tw

## PE4-031DF24-01F0 Device

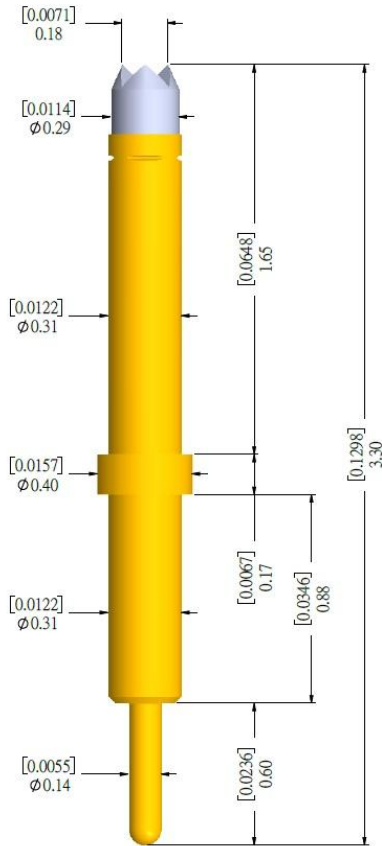

L/B

## Material & Finishes

- Device Side Plunger :Pd alloy
- L/B Side Plunger :BeCu alloy with Au plated
- Barrel :Phosphor Bronze alloy with Au plated
- Spring : Music Wire (SWP) with Au plated

## Mechanical

- Full Travel : 0.50mm
- Recommended Travel : 0.40mm
- Spring Force : 35g ±20% at 0.40mm
- Operating Temp. : -15°C~125°C

## Electrical Analysis Tools

- Agilent Network Analyzer E5071C
- Tektronix DSA8200
- HFSS, ADS, Q3D, Designer

## Electrical Characteristics

- Current Rating : 1A Continuous
- Contact Resistance : <100mΩ (AVG)
- Characteristic Impedance : 46.20Ω
- Insertion Loss: -1dB>20GHz
- Return Loss: -20dB@7.46GHz
- Time Delay: 17.94psec
- Loop Inductance: 0.83nH
- Capacitance: 0.39pF

