

4

3



2

1

Please Approve this Drawing

Date	
Signature	

REVISIONS		
LTR	DESCRIPTION	ECN No.
	INITIAL RELEASE	ECN-10712001
①		
②		

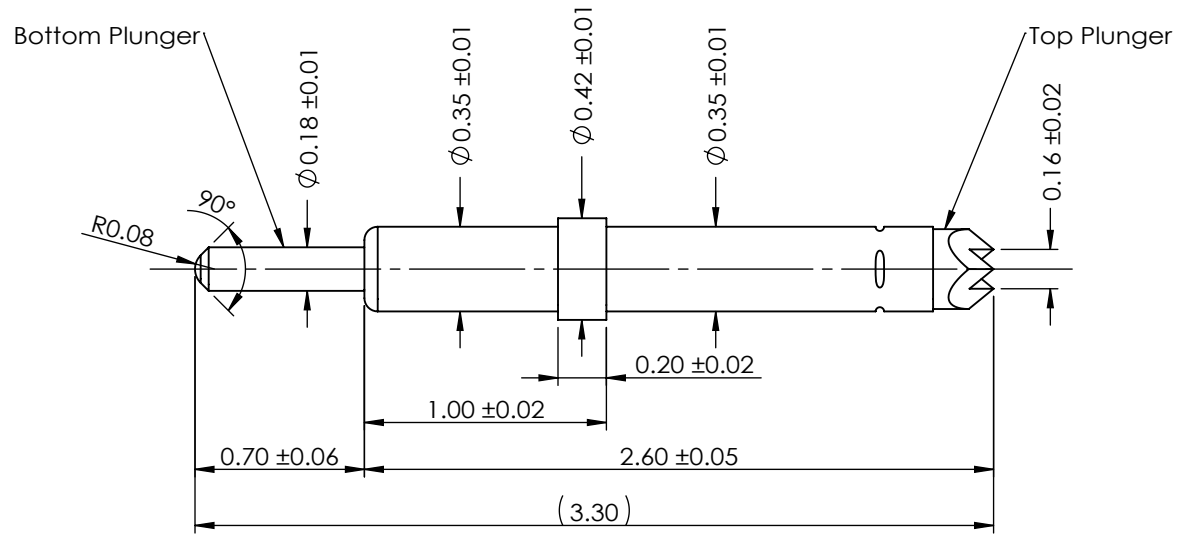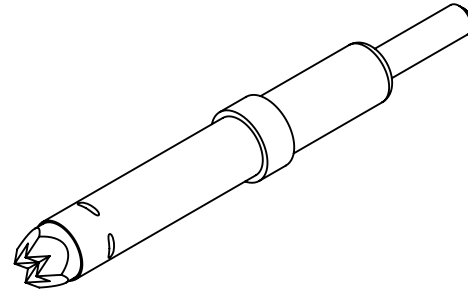

Notes :

1.Materials and Finishes

Top Plunger : Pd alloy

Barrel : PhBz alloy with gold plating

Spring : SWP with gold plating

Bottom Plunger : BeCu alloy with gold plating

2.Mechanical

Recommended travel : 0.50 mm

Full travel : 0.60 mm

Spring force : 11 g at initial travel



Spring force : 30 g \pm 20% at recommended travel

Spring force : 35 g \pm 20% at full travel

3.Durability :

Mechanical life : 200k cycles(minimum) at recommended travel

4.Pointing accuracy : \pm 0.05 mm



Drawn	Chuna_W	Date	2018/12/4
Checked	Kevin_W	Date	2018/12/4
Approved	Allan_L	Date	2018/12/4
Scale	32:1	Unit	mm

中國探針股份有限公司
C. C. P. CONTACT PROBES CO., LTD.

TITLE IC Test Probes
A $\phi 0.35 * \phi 0.33 * 3.30\text{mm}$

DIMENSIONS ARE IN MILLIMETERS
TOLERANCES ARE:
DECIMALS ANGLES
X. \pm .25 \pm 5.0°
XX \pm .15 \pm 3.0°
XXX \pm .10 \pm 2.0°

THE INFORMATION AND DESIGN DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF C.C.P. CONTACT PROBES CO.,LTD. C.C.P. CONTACT PROBES CO.,LTD. RESERVES ALL PATENT, PROPRIETARY DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THEREOF, AND TO ANY ARTICLE DISCLOSED HEREIN EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE FOREGOING DOES NOT APPLY TO VENDOR PROPRIETARY RIGHTS.

Size	A4	Symbol	□	Drawing No.	PE4-035EP23-01B0	Rev.	A0
------	----	--------	---	-------------	------------------	------	----

4

3

2

1