


Please Approve this Drawing

Date	
Signature	

REVISIONS(修正)			
NO. (序号)	DESCRIPTION(描述)	ECN NO.(变更号)	DATE(日期)
A.0	INITIAL RELEASE(首次发行)	ECN-2201708006	2017.08.04

东莞中探探针有限公司
 研發單位
 2017-08-08
 圖面請妥善保管
 版權所有翻印必究

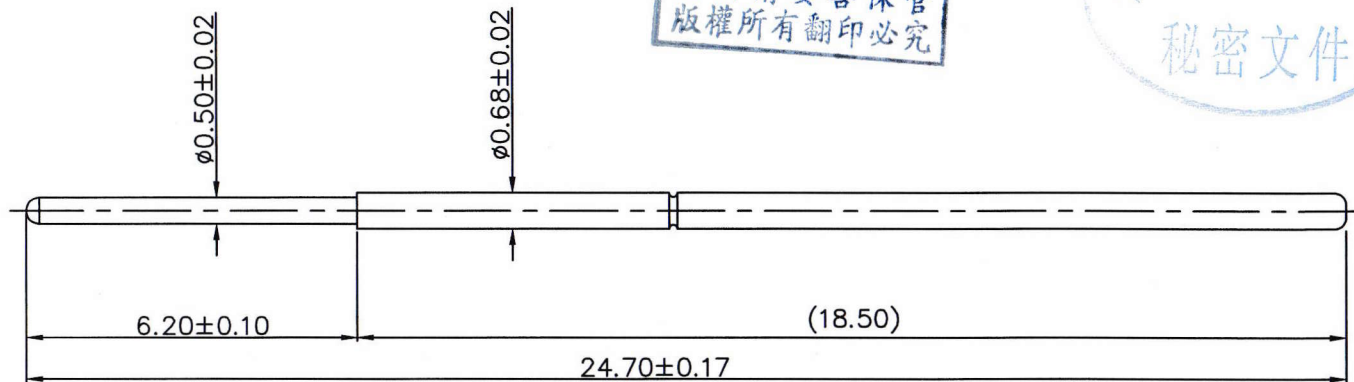

NOTE;

1.Material

Plunger: BeCu Au Plated
 Barrel: PhBz Au Plated
 Spring: SUS304

2.Electrical

Rated current : 3A Max.
 Contact resistance: 100 mohm maximum at working stroke(quiescence)

3.Mechanical

Full stroke: 4.20 mm
 Spring Force :100g±20% at 2.80 mm working stroke
 Durability: 100,000 cycles(minimum)

4.Harmful material control please follow DOC. NO."DQ03050"

DRAW (设计)	linyushou	SCALE (比例)	10 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	P-02D-0515
COUNTER SIGN (会签)		SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	Seeing notes (见备注)
AUDIT (审核)		DATE (日期)	2017.08.04	VER (版次)	A.0	TITLE (品名)	Test Probe
APPROVE (核准)		PLATE (镀层)	Seeing notes(见备注)				

THE UNMARKED TOLERANCE ARE AS BELOW :

LENGTH (尺寸)		ANGLE (角度)	
0~6.0	±0.05mm	0.0	±2.0°
>6~30	±0.10mm	0.0	±1.0°
>30~120	±0.15mm	0.00	±0.50°

C.C.P. (DG) CONTACT PROBES CO.,LTD.
 东莞中探探针有限公司

The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.