


REVISIONS (修正)			
NO. (序号)	DESCRIPTION(描述)	ECN NO.(变更号)	DATE(日期)
A.0	NEW RELEASE	ECN-2201911004	2019/11/11

Please Approve this Drawing	
Date	
Signature	

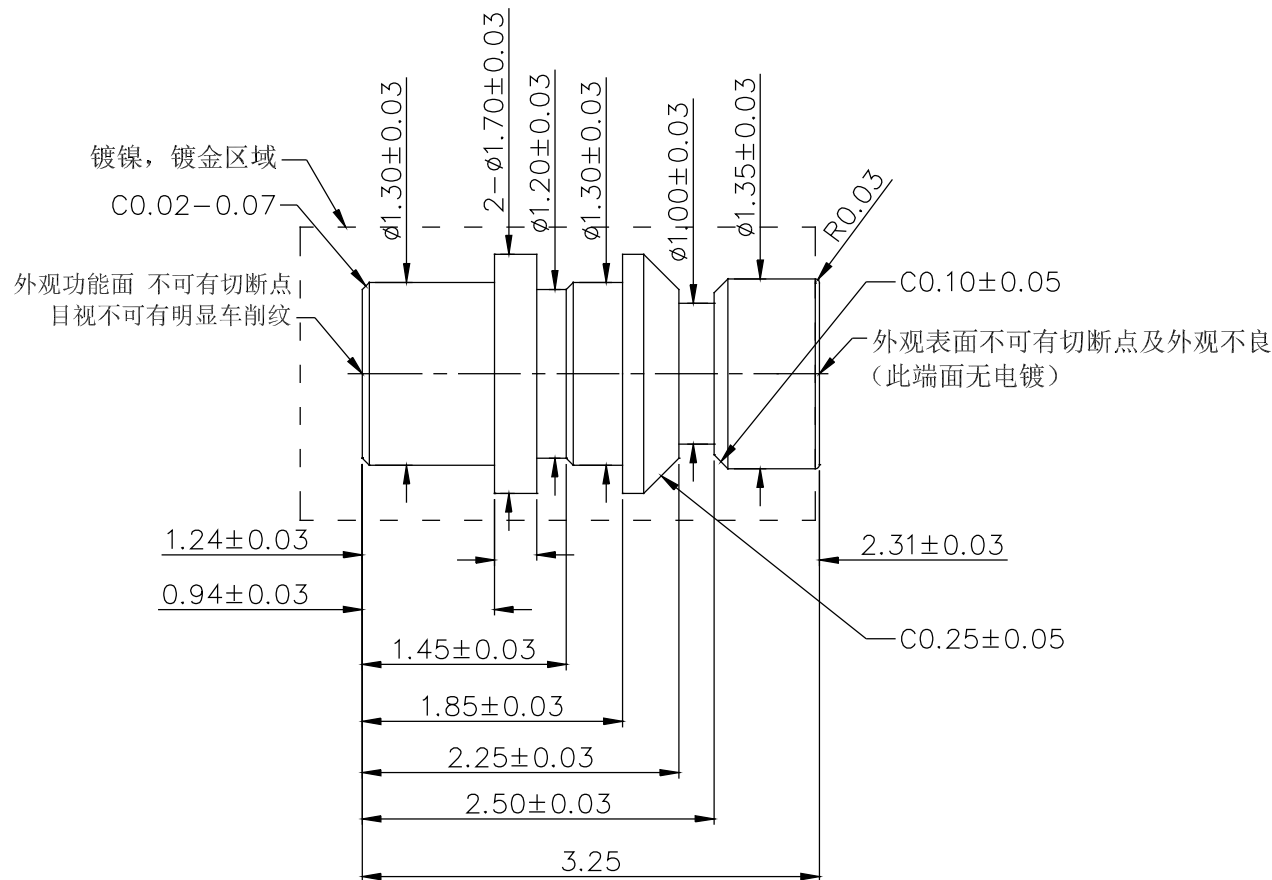

备注:

1. 材质:
.Pin: SUS 316F
2. 电镀:
Pin: 最少镀镍10 micro-inch 后最少镀金10 micro inch
3. 电气特性
.电压& 电流: 直流电5伏1安
.接触阻抗: 在工作高度时最大阻抗216毫欧 (静态)
4. 有害物质管控请遵循文件NO. "DQ03050"
5. Packing specification please follow DOC No. "DR03042"
(包装规范请遵循文件NO. "DR03042")

DRAW (设计)	贺 志 鹏	SCALE (比例)	20: 1	UNIT (单位)	mm	DRAWING NO. (图号)	HCS00146FM1-B
COUNTER SIGN (会签)		SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	Seeing notes (见备注)
AUDIT (审核)		DATE (日期)	2019/11/11	VER (版次)	A.0	TITLE (品名)	Pin Conn.
APPROVE (核准)		PLATE (镀层)	Seeing notes(见备注)				
THE UNMARKED TOLERANCE ARE AS BELOW : (未标记的公差) LENGTH (尺寸)				C.C.P. (DG) CONTACT PROBES CO.,LTD. 东莞中探探针有限公司			
ANGLE (角度)							
0~6.0	±0.05mm	0.	±2.0°	The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.			
>6~30	±0.10mm	0.0	±1.0°				
>30~120	±0.15mm	0.00	±0.50°				