

4

3


2

1

Please Approve this  
Drawing

Date	
Signature	

REVISIONS (修正)			
NO. (序号)	DESCRIPTION(描述)	DCN NO.(变更号)	DATE(日期)
D.0	NEW RELEASE	DCN-	-

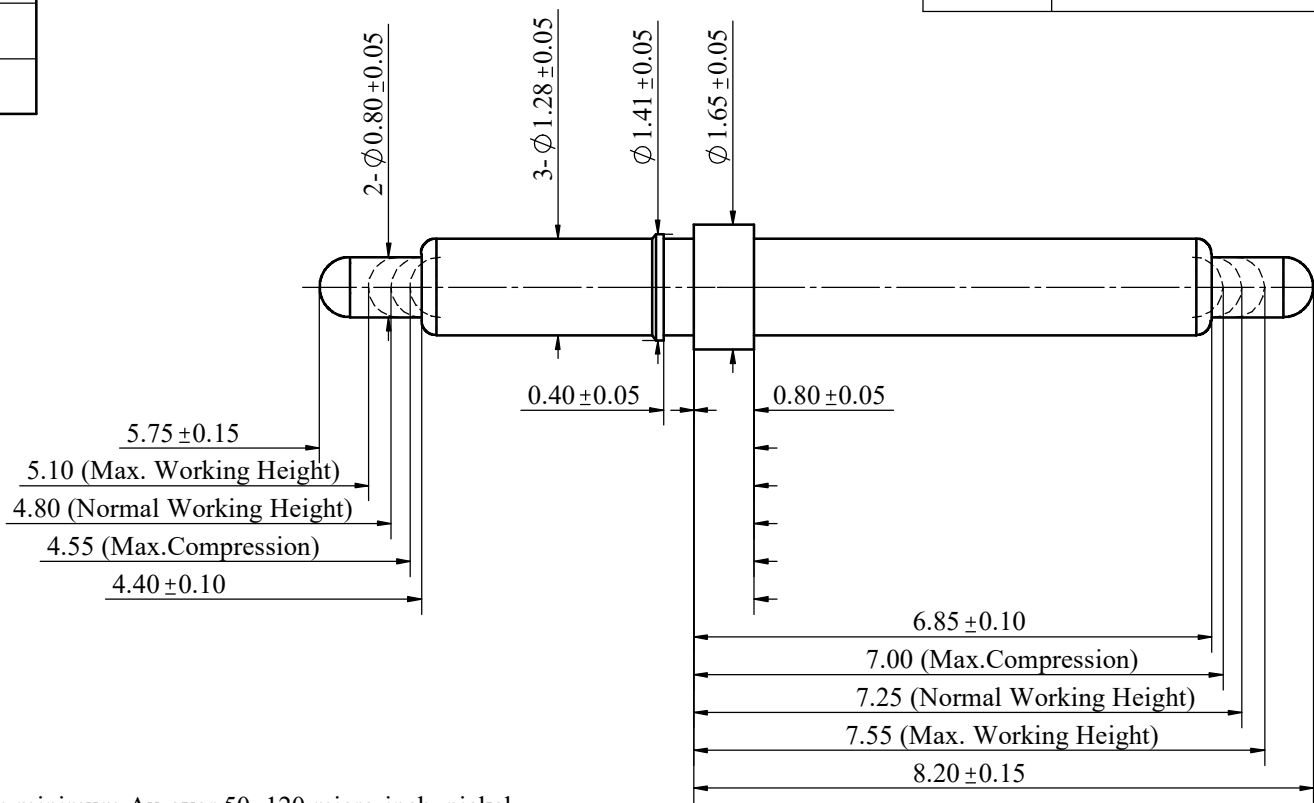

**NOTE:**

**1.Material**

Plunger: Brass  
Barrel: Brass  
Spring: SUS

**2.Plating**

Plunger: 30 micro-inch minimum Au over 50~120 micro-inch nickel  
Barrel : 30 micro-inch minimum Au over 50~120 micro-inch nickel

**3.Electrical**

Rated current & voltage: DC12V; 2A.  
Contact resistance: 50 mohm maximum at working height(quiessence)

**4.Mechanical**

Spring force: 85g±20g at 4.80 Normal working height  
Spring force: 85g±20g at 7.25 Normal working height  
Durability: 10,000 cycles(minimum)

**5.To ensure the best usage,please operate it based on the working height**  
Based on the engineering drawings,shall not exceed the maximum allowed compression

**6.RoHS & HF complied product.**

DRAW (设计)	梁伟杰	SCALE (比例)	10:1	UNIT (单位)	mm	DRAWING NO. (图号)	P08226DH1
COUNTER SIGN (会签)	N/A	SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	Seeing notes (见备注)
AUDIT (审核)	肖大庭	DATE (日期)	2020.03.07	VER (版次)	D.0	TITLE (品名)	Pogo Pin
APPROVE (核准)	-	PLATE (镀层)	Seeing notes(见备注)				

THE UNMARKED TOLERANCE ARE AS BELOW :  
(未标记的公差)  
LENGTH (尺寸) ANGLE (角度)  
0~6.0 ±0.05mm 0. ±2.0°  
>6~30 ±0.10mm 0.0 ±1.0°  
>30~120 ±0.15mm 0.00 ±0.50°

**C.C.P. (DG) CONTACT PROBES CO.,LTD.**  
**东莞中探探针有限公司**  
The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.

4

3

2

1