

4

3

2

1



REVISIONS

No.	DESCRIPTION	ECN No.	DATE
	INITIAL RELEASE	DCN-2201506043	2015.06.30
△1	RO.20改为CO.10	DCN-2201508002	2015.08.03

Please Approve
This Drawing

Date

Signature

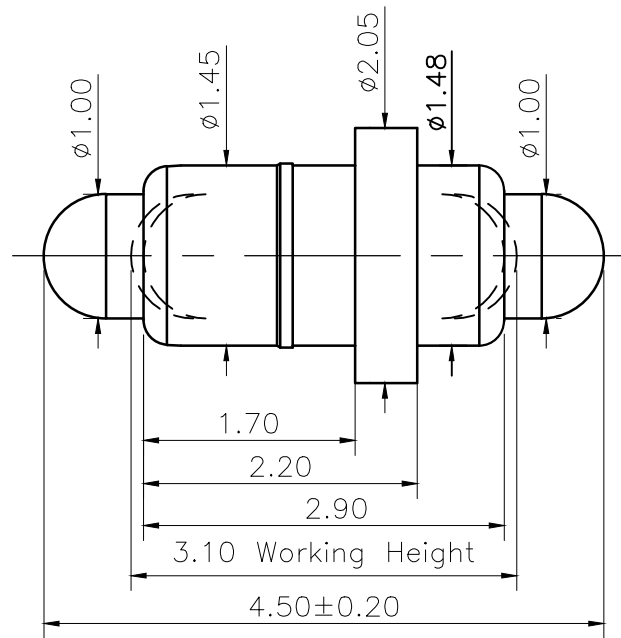

NOTE;

1.Material

Barrel & Plunger: Brass C3604
Spring:SUS304

2.Plating

Barrel& Plunger: 10 micro inch minimum Au over 50~100 micro inch Ni

3.Electrical

Rated current & voltage: DC12V;1A.

Contact resistance: 100 mohm Max. at working height(quiescence)

4.Mechanical

Spring force: 80g±20%g at working height.

Durability: 10,000 cycles(minimum)

5.To ensure the best usage,please operate it based on the working height.

Based on the engineering drawings, shall not exceed the maximum allowed compression.

6.Harmful material control please follow DOC. NO."DQ03050"

DRAWN	linyushou	SCALE:	12 : 1	UNIT	mm	DRAWING NO.	P3193DP01
CHECKED		SHEET:	1 of 1	PROJECT		TITLE:	
APPROVED		DATE:	2015.08.03	VER.	A.1	Pogo Pin	
THE UNMARKED TOLERANCE ARE AS BELOW :				C.C.P. (DG) CONTACT PROBES CO.,LTD.			
LENGTH		ANGLE		东莞中探探针有限公司			
0~6.0	±0.05mm	0.	±2.0°	The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.			
>6~30	±0.10mm	0.0	±1.0°				
>30~120	±0.15mm	0.00	±0.50°				

4

3

2

1