


Please Approve this
Drawing

Date

Signature

REVISIONS (修正)

NO. (序号)	DESCRIPTION(描述)	DCN NO.(变更号)	DATE(日期)
D.0	NEW RELEASE	DCN-201805091	2018.05.11
D.1	Modify 0.26±0.02 to 0.26±0.03	DCN-201805211	2018.06.15

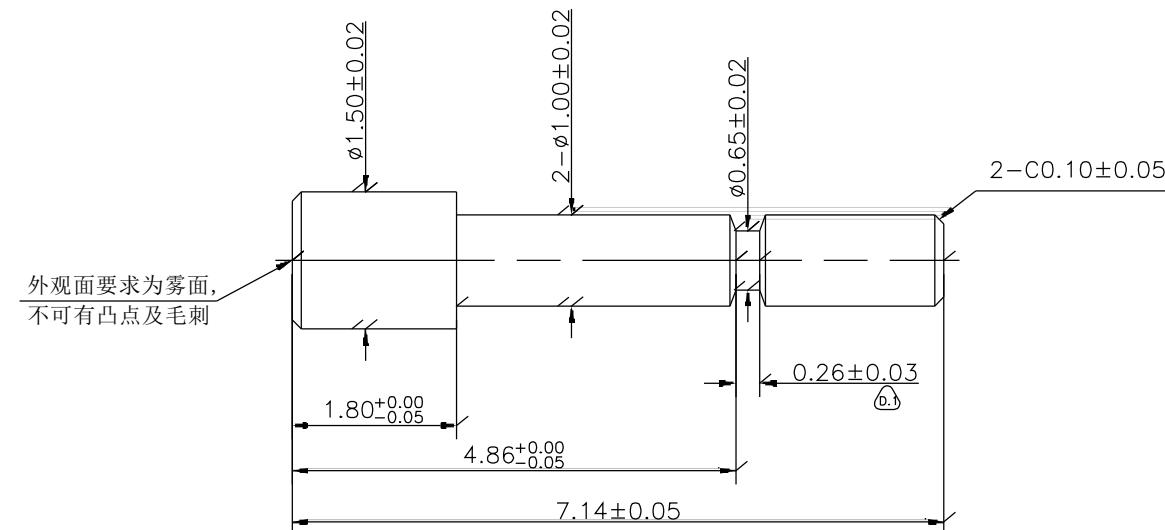

NOTE:

1.Material
Pin: SUS316F

2.Plaing
Pin: 80 micro-inch minimum Au over 20 micro-inch minimum CuSn over 130 micro-inch minimum Cu over 40 micro-inch minimum Nickel

3.Electrical
Contact resistance: 50 mohm maximum at working height(quiescence)

4.RoHS & HF complied product.

DRAW (设计)	刘文娟	SCALE (比例)	10 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	HCS1636SM02-B	
COUNTER SIGN (会签)		SHEET (页数)	1 of 1	PROJECT (视图)	○ □	MATERIAL (材质)	Seeing notes (见备注)	
AUDIT (审核)		DATE (日期)	2018.06.15	VER (版次)	D.1	TITLE (品名)	pin	
APPROVE (核准)		PLATE (镀层)	Seeing notes(见备注)					
THE UNMARKED TOLERANCE ARE AS BELOW : (未标记的公差)				C.C.P. (DG) CONTACT PROBES CO.,LTD. 东莞中探探针有限公司				
LENGTH (尺寸)				ANGLE (角度)				
0~6.0 ±0.05mm				0 ±2.0°				
>6~30 ±0.10mm				0.0 ±1.0°				
>30~120 ±0.15mm				0.00 ±0.50°				
The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.								