






Please Approve this Drawing

Date	
Signature	


REVISIONS			
NO.	DESCRIPTION	ECN NO.	DATE
A.0	INITIAL RELEASE	ECN-2201412028	2014.12.15
A.1	Change the size	ECN-2201501020	2015.01.15

NOTE:

- Material
Housing: Black LCP (UL94V-0)
Plunger: Brass C3601
- Plating
Contact Surface: 10 micro inch minimum Au over 50~100micro inch Ni
- Electrical
Rated Current & Voltage: DC12V; 2A
Contact Resistance: 50 mhm maximum at Working Height.(Quiescence)
- To ensure the best usage, please operate it based on the working Height
.Based on the Engineering Drawings, shall not exceed the maximum allowed compression.
- Harmful material control please follow DOC.NO. "DQ03050"

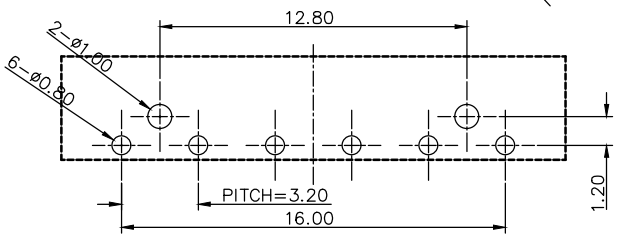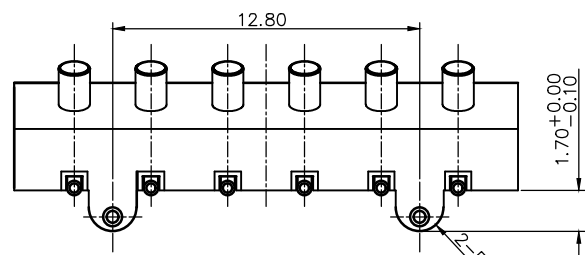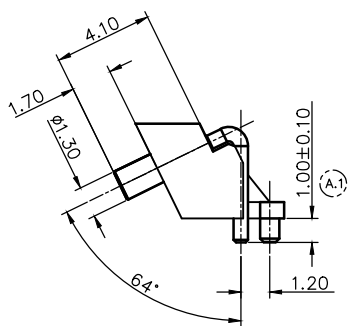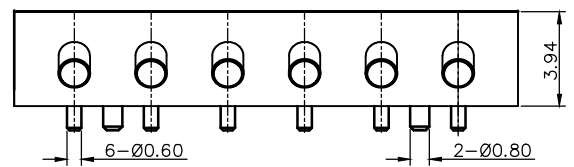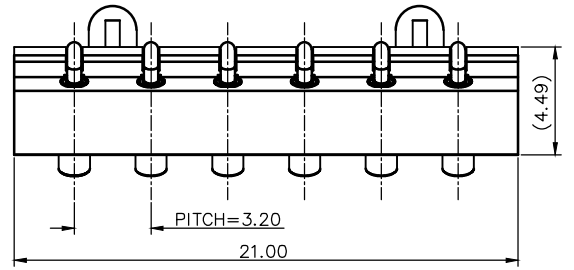

RECOMMEND PCB LAYOUT
Layout Tolerance: ± 0.05mm

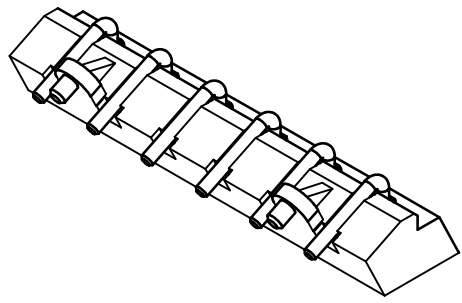

DRAWN	吴鹏	SCALE	1 : 1	UNIT	mm	DRAWING NO.	P2509FT01-06A320HR
CHECKED		SHEET	1 of 1	PROJECT		TITLE 6PIN POGO PIN	
APPROVED		DATE	2015.01.15	VER.	A.1		
THE UNMARKED TOLERANCE ARE AS BELOW :				C.C.P. (DG) CONTACT PROBES CO.,LTD. 东莞中探探针有限公司			
LENGTH		ANGLE		The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.			
0~6.0	±0.05mm	0.	±2.0°				
>6~30	±0.10mm	0.0	±1.0°				
>30~120	±0.15mm	0.00	±0.50°				