





REVISIONS (修正)			
NO. (序号)	DESCRIPTION(描述)	ECN NO.(变更号)	DATE(日期)
A.0	NEW RELEASE	ECN-2201908003	2019.08.07

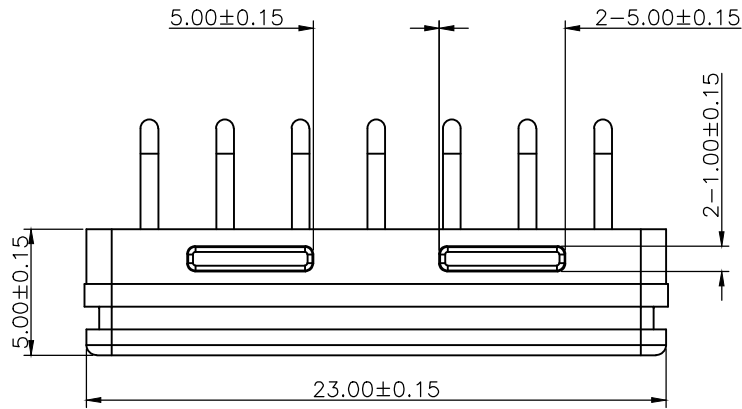


Please Approve this Drawing	
Date	
Signature	

NOTES(备注):

- Materials:
 - .Housing : Black HTN+30%GF UL94V-0
 - .Pin: Brass C3601
 - .Glue:Waterproof glue
- Plating:
 - .Pin :10 micro-inch minimum Au over 50~120 micro-inch Ni.
- RoHS & HF complied product.

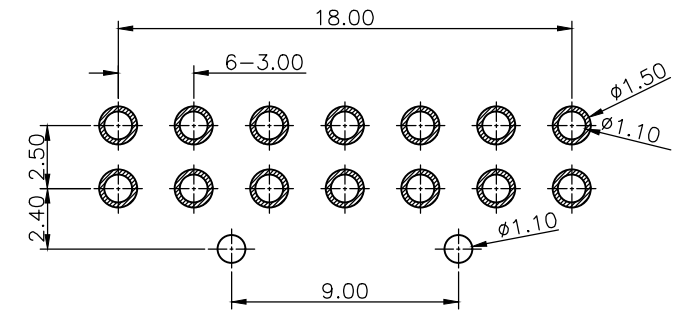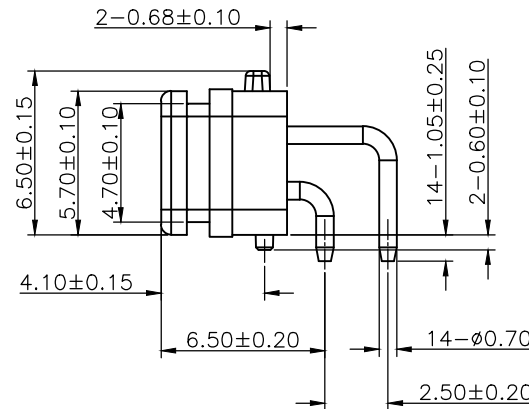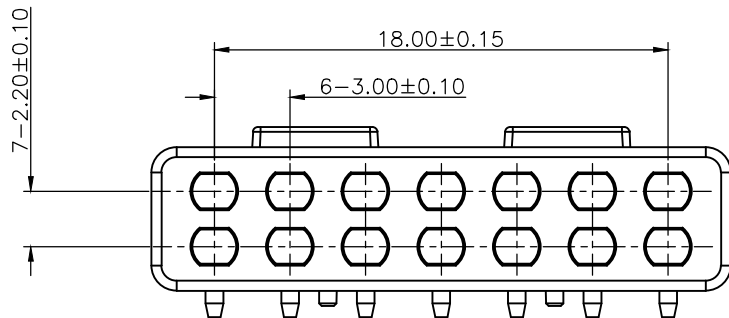

RECOMMEND PCB LAYOUT(TOP VIEW)
Layout Tolerance: ± 0.05mm

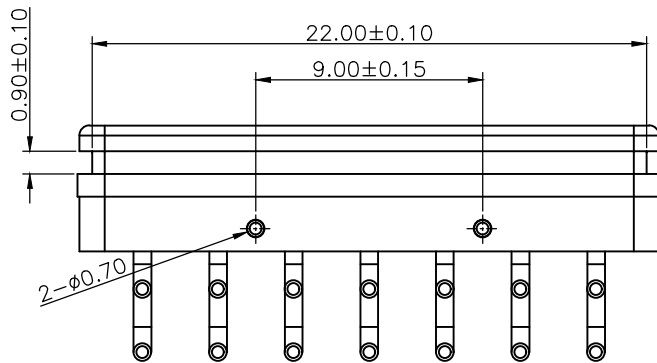

DRAW (设计)	Hendy	SCALE (比例)	10 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	P6788FS01-14A300HR
COUNTER SIGN (会签)		SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	Seeing notes (见备注)
AUDIT (审核)		DATE (日期)	2019.08.07	VER (版次)	A.0	TITLE (品名)	Female 14pin Conn.
APPROVE (核准)		PLATE (镀层)	Seeing notes(见备注)				

THE UNMARKED TOLERANCE ARE AS BELOW :
(未标记的公差)

LENGTH (尺寸)		ANGLE (角度)	
0~6.0	±0.05mm	0.	±2.0°
>6~30	±0.10mm	0.0	±1.0°
>30~120	±0.15mm	0.00	±0.50°

C.C.P. (DG) CONTACT PROBES CO.,LTD.
东莞中探探针有限公司

The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.