


Please Approve this Drawing	
Date	
Signature	

REVISIONS			
NO.	DESCRIPTION	ECN NO.	DATE
	INITIAL RELEASE	ECN-220131149	2013.11.28
Δ			

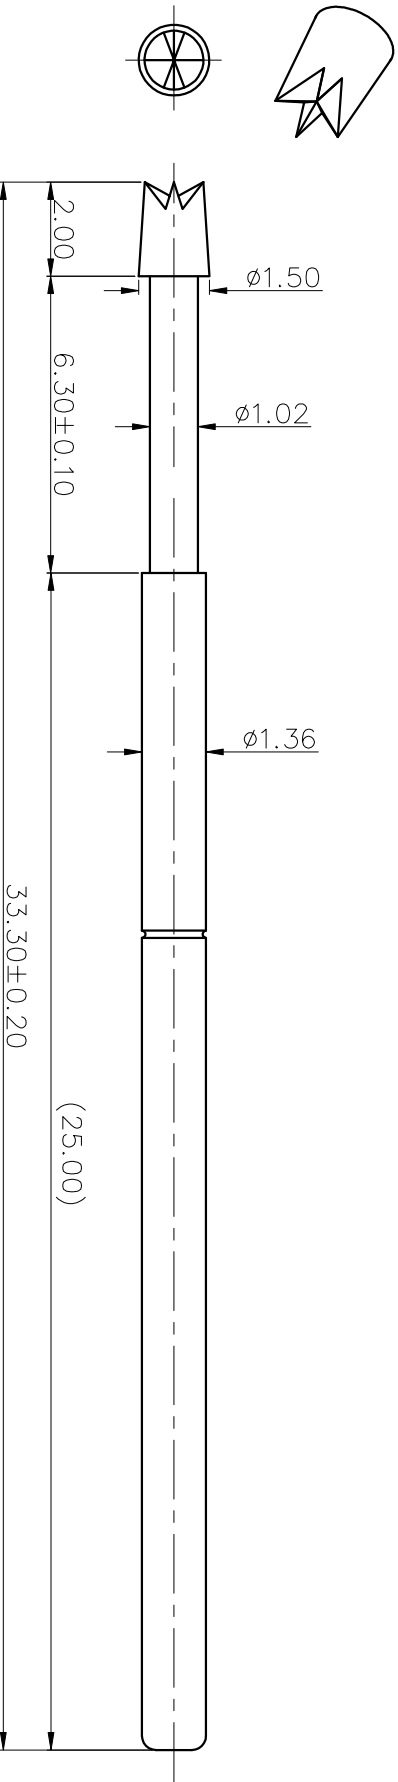

NOTE:

1.Material
Plunger: BeCu Au Plated
Barrel: Brass Au Plated
Spring: SUS304 Not Au Plated

2.Electrical
Rated current : 3A Max.
Contact resistance: 50 mohm maximum at working stroke(quiesscence)

3.Mechanical
Full stroke: 6.30 mm
Spring Force : 170g±20% at 4.20 mm working stroke
Durability: 100,000 cycles(minimum)

4.Harmful material control please follow DQC. NO."DQ03050"

5.Working temperature: -40℃~180℃(peak)

DRAWN	linyushou	SCALE:	1 : 1	UNIT	mm	DRAWING NO.	P-25F2-1525
CHECKED		SHEET:	1 of 1	PROJECT		TITLE. Test Probe	
APPROVED		DATE:	2013.11.28	VER.	A.0		
THE UNMARKED TOLERANCE ARE AS BELOW :							
LENGTH		ANGLE					
0~6.0	±0.05mm	0.	±2.0°				
>6~30	±0.10mm	0.0	±1.0°				
>30~120	±0.15mm	0.00	±0.50°				
C.C.P. (DG) CONTACT PROBES CO.,LTD.							
东莞中探探针有限公司							
The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.							