

4

3

2





1

REVISIONS(修正)


NO. (序号)	DESCRIPTION(描述)	ECN NO.(变更号)	DATE(日期)
A.0	INITIAL RELEASE	ECN-2201407003	2014.07.01
A.1	Pin 镀金20u"TO 30u"	ECN-2201407013	2014.07.04

Please Approve this Drawing

Date	
Signature	

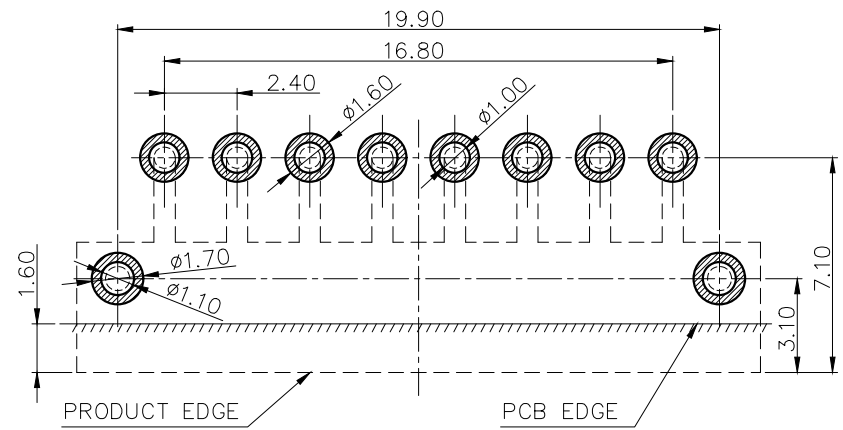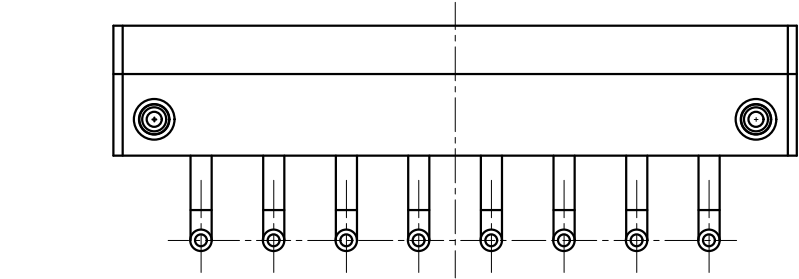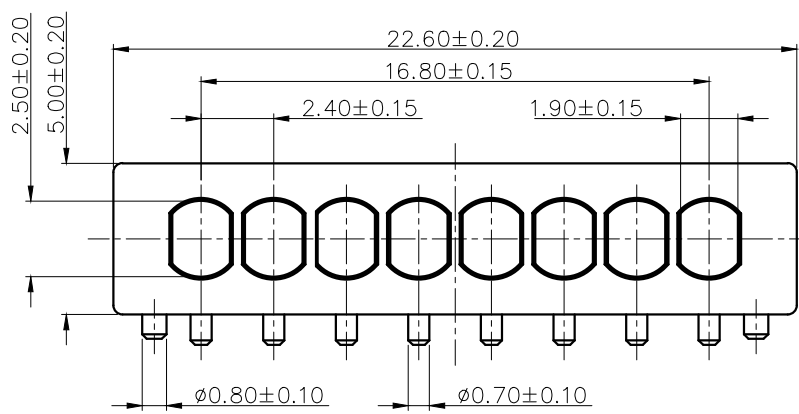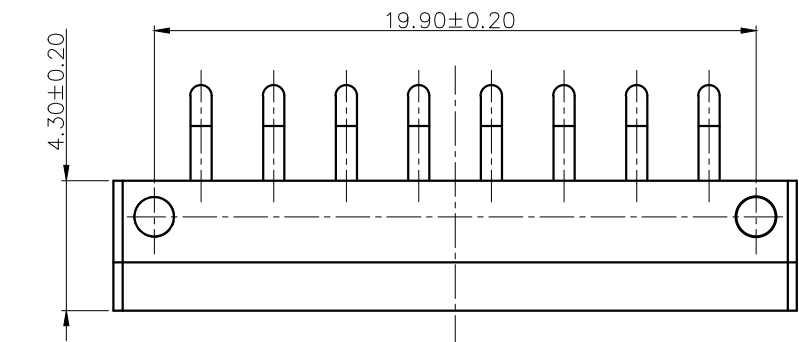

RECOMMEND PCB LAYOUT(TOP VIEW)
Layout Tolerance: ±0.05

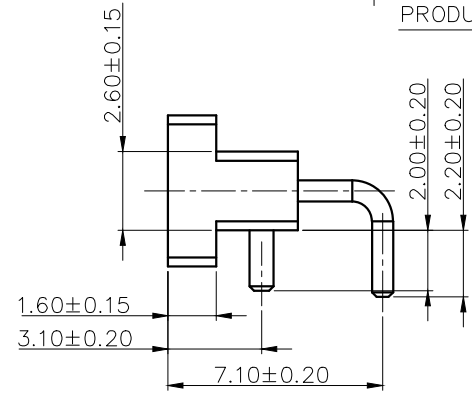

- NOTES:
- Materials:
 - .Housing: High Temperature Polyester(UL94V-0),Black
 - .Pin: Brass
 - .Latch: Brass
 - Plating:
 - .Pin :30 micro-inch minimum Au over 50~100 micro-inch nickel
 - .Latch :Gold Flash Au over 50~100 micro-inch nickel
 - Electrical
 - .Rated Current & Voltage : DC 12V ; 2A Max
 - .Contact resistance:50 mohm maximum;
 - .Harmful material control please follow DOC. NO."DQ03050 "

DRAWN (设计)	潘红	SCALE (比例)	4 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	P2382FT01-08B240HT
CHECKED (确认)		SHEET (页数)	1 of 1	PROJECT (视图)		TITLE (品名)	2.40mm Pitch 8Pin connector
APPROVED (核准)		DATE (日期)	2014.07.04	VER. (版本)	A.1		
THE UNMARKED TOLERANCE ARE AS BELOW : (未标记的公差) LENGTH (尺寸)				ANGLE (角度)			
0~6.0	±0.05mm	0.	±2.0°				
>6~30	±0.10mm	0.0	±1.0°				
>30~120	±0.15mm	0.00	±0.50°				
				C.C.P. (DG) CONTACT PROBES CO.,LTD. 东莞中探探针有限公司			
The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.							

4

3

4

2

1

A