
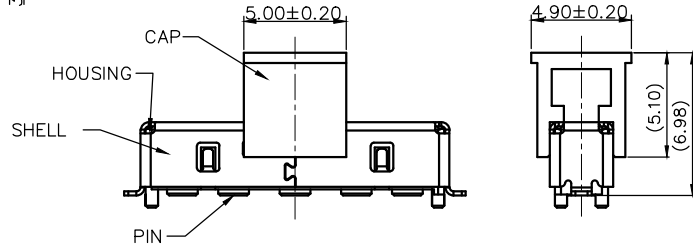




Please Approve this Drawing

| | |
|-----------|--|
| Date | |
| Signature | |

| REVISIONS | | | |
|-----------|-----------------|------------|------------|
| NO. | DESCRIPTION | ECN NO. | DATE |
| A.0 | INITIAL RELEASE | 2201412030 | 2014.12.15 |
| A. | 铁壳两焊脚开槽 | 2201504001 | 2015.04.01 |

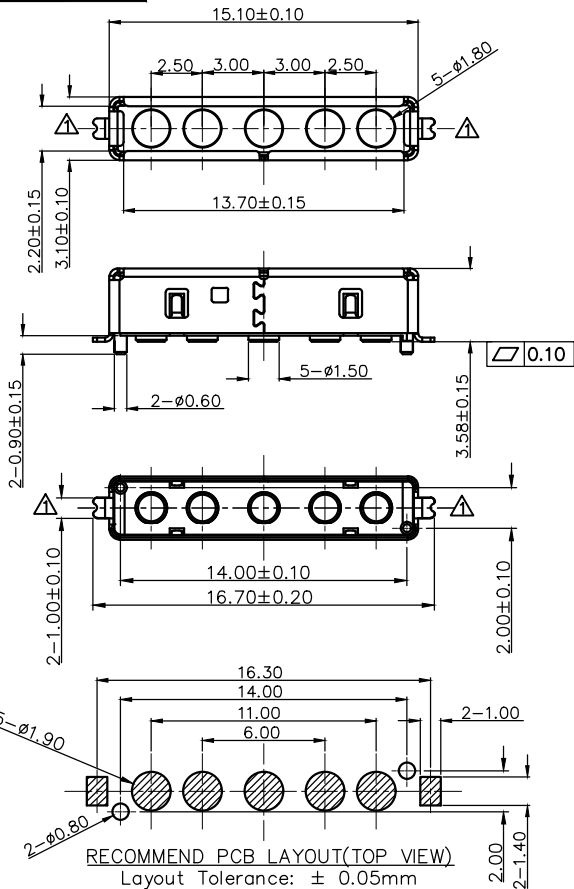

NOTES:

- Materials:
 - .Housing: LCP(UL94V-0),Black.
 - .Cap : HTN(UL94V-0),Black.
 - .Pin : Brass C3604
 - .Shell: SUS304
- Plating:
 - .Pin : 30 micro-inch minimum Au over 50~100 micro-inch Ni.
 - .Shell: 30~50 micro-inch black Ni overall.
- Electrical:
 - .Rated Current & Voltage : DC 12 V; 1A.
- Harmful material control please follow DOC. NO. "DQ03050".
- Halogen free&rohs compliant products.

| | | | | | | | |
|---------------------------------------|----------|--------|------------|--|-----|-------------|--------------------|
| DRAWN | nialding | SCALE: | 4 : 1 | UNIT | mm | DRAWING NO. | P2562FL05-05Q250MR |
| CHECKED | | SHEET: | 1 of 1 | PROJECT | | TITLE: | Pin Connector |
| APPROVED | | DATE: | 2015.04.01 | VER. | A.1 | | |
| THE UNMARKED TOLERANCE ARE AS BELOW : | | | | C.C.P. (DG) CONTACT PROBES CO.,LTD. 东莞中探探针有限公司 | | | |
| LENGTH | | ANGLE | | The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission. | | | |
| 0~6.0 | ±0.05mm | 0. | ±2.0° | | | | |
| >6~30 | ±0.10mm | 0.0 | ±1.0° | | | | |
| >30~120 | ±0.15mm | 0.00 | ±0.50° | | | | |