

4

3


▽

2

1

Please Approve this Drawing	
Date	
Signature	

REVISIONS			
NO.	DESCRIPTION	ECN NO.	DATE
	INITIAL RELEASE	ECN-2201407072	2014.07.28
△			

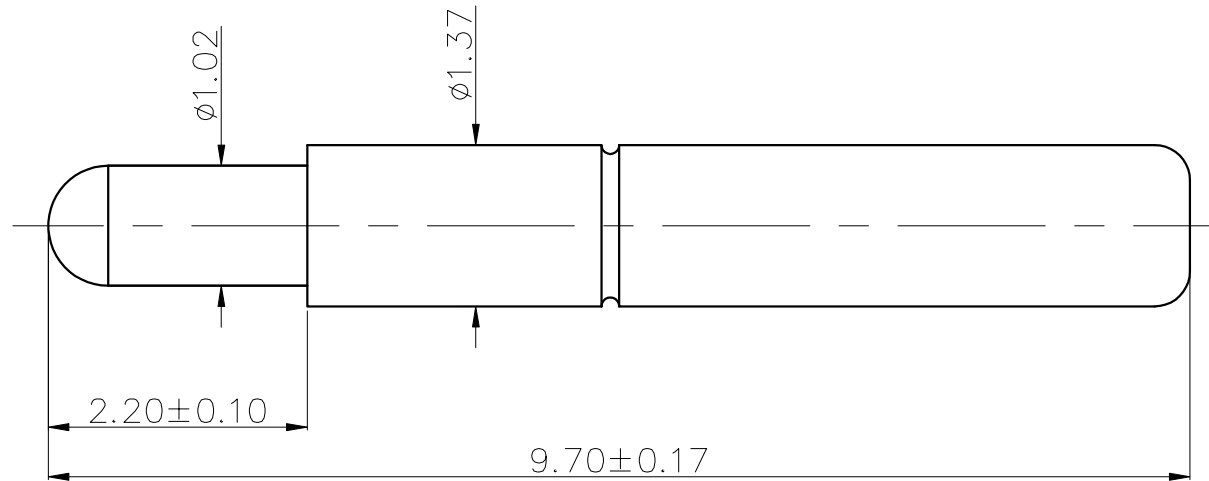

NOTE;

1.Material

Plunger: BeCu Au Plated  
 Barrel: Brass Au Plated  
 Spring: SUS304 Not Au Plated  
 Ball: SUS

2.Electrical

Rated current : 3A Max.  
 Contact resistance: 100 mohm maximum at working stroke(quiescence)

3.Mechanical

Full stroke: 1.50 mm  
 Spring Force : 80g±20% at 1.00 mm working stroke  
 Durability: 100,000 cycles(minimum)

4.Harmful material control please follow DOC. NO."DQ03050"

DRAWN	linyushou	SCALE:	1 : 1	UNIT	mm	DRAWING NO.	S-6D-0511
CHECKED		SHEET:	1 of 1	PROJECT		TITLE. Test Probe	
APPROVED		DATE:	2014.07.28	VER.	A.0		

THE UNMARKED TOLERANCE ARE AS BELOW :

LENGTH	ANGLE
0~6.0	±0.05mm
>6~30	±0.10mm
>30~120	±0.15mm
	0.0 ±2.0°
	0.0 ±1.0°
	0.00 ±0.50°

**C.C.P. (DG) CONTACT PROBES CO.,LTD.**  
**东莞中探探针有限公司**

The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.

4

3

▽

2

1