


Please Approve this Drawing	
Date	
Signature	

REVISIONS			
NO.	DESCRIPTION	ECN NO.	DATE
	INITIAL RELEASE	ECN-2201505042	2015.05.22
△			

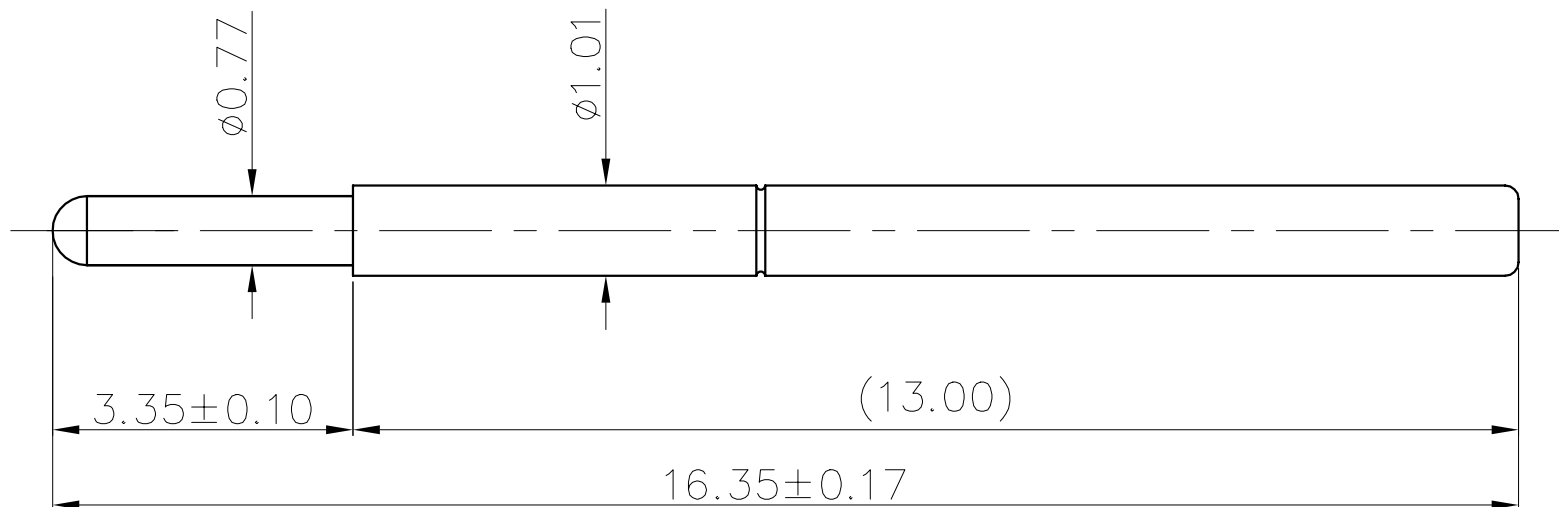


NOTE;

1.Material
Plunger: BeCu Au Plated
Barrel: Brass Au Plated
Spring: SUS304

2.Electrical
Rated current : 3A Max.
Contact resistance: 50 mohm maximum at working stroke(quiescence)

3.Mechanical
Full stroke: 2.54 mm
Spring Force :90g±20% at 1.90 mm working stroke
Durability: 100,000 cycles(minimum)

4.Harmful material control please follow DOC. NO."DQ03050"

DRAWN	linyushou	SCALE:	1 : 1	UNIT	mm	DRAWING NO.	P-1D-0513
CHECKED		SHEET:	1 of 1	PROJECT		TITLE. Test Probe	
APPROVED		DATE:	2015.05.22	VER.	A.0		
THE UNMARKED TOLERANCE ARE AS BELOW :						C.C.P. (DG) CONTACT PROBES CO.,LT 东莞中探探针有限公司	
LENGTH		ANGLE					
0~6.0	±0.05mm	0.	±2.0°				
>6~30	±0.10mm	0.0	±1.0°				
>30~120	±0.15mm	0.00	±0.50°				
						The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.	