

4

3


2

1

REVISIONS ( 修正)

NO. (序号)	DESCRIPTION(描述)	DCN NO.( 变更号)	DATE(日期)
D.0	NEW RELEASE	DCN-201712097	2017.12.20

Please Approve this Drawing	
Date	
Signature	

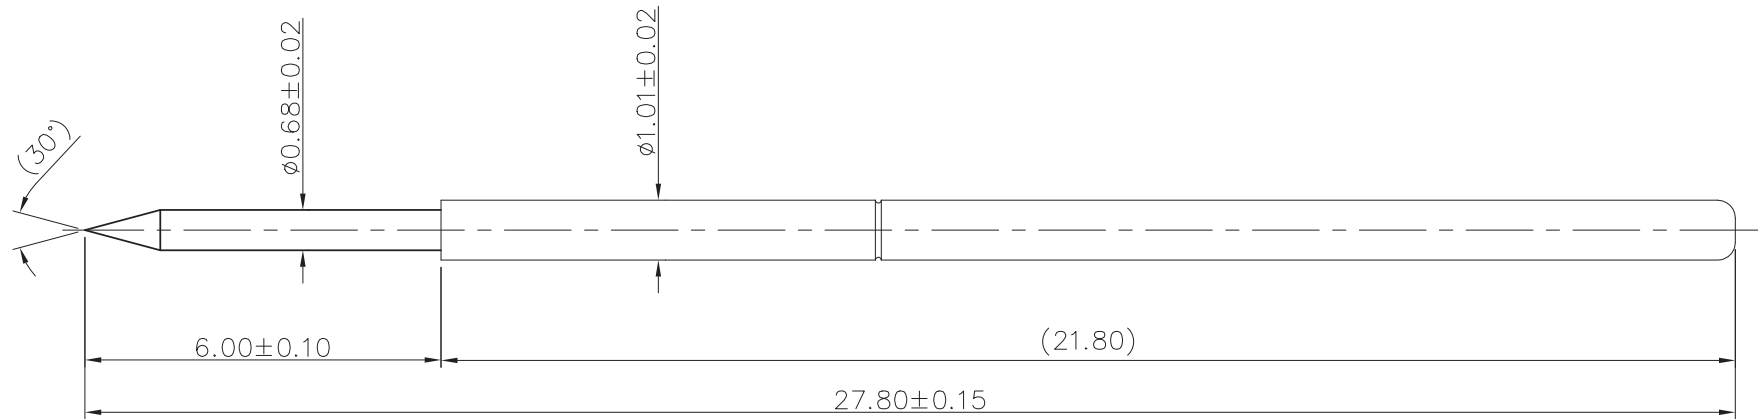

NOTE;

1.Material

Plunger: BeCu 10u" Au Plated

Barrel: Brass 2u" Au Plated

Spring: SUS Not Plated

2.Electrical

Rated current : 1.0A Max.

Contact resistance: 100 mohm maximum at 4.00mm Working Stroke(quiescence)

3.Mechanical

Full stroke: 6.00 mm

Spring Force :150g±20%g at 6.00 mm Full Stroke

Mechanical life: 100,000 cycles(minimum) at 4.00 mm Working Stroke

4.RoHS and HF compliant product.

DRAW (设计)	linyushou	SCALE (比例)	10 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	CM-M1-101-17092
COUNTER SIGN (会签)		SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	Seeing notes (见备注)
AUDIT (审核)		DATE (日期)	2017.12.20	VER (版本)	D.0	TITLE (品名)	Test Probe
APPROVE (核准)		PLATE (镀层)	Seeing notes(见备注)				
THE UNMARKED TOLERANCE ARE AS BELOW : (未标记的公差)				C.C.P. (DG) CONTACT PROBES CO.,LTD.			
LENGTH (尺寸)		ANGLE (角度)		东莞中探探针有限公司			
0~6.0	±0.05mm	0.	±2.0°	The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.			
>6~30	±0.10mm	0.0	±1.0°				
>30~120	±0.15mm	0.00	±0.50°				

4

3

2

1