


Please Approve this Drawing

| | |
|-----------|--|
| Date | |
| Signature | |

| REVISIONS | | | |
|-----------|-----------------|---------------|------------|
| NO. | DESCRIPTION | ECN NO. | DATE |
| | INITIAL RELEASE | ECN-220131149 | 2013.11.28 |
| △ | | | |

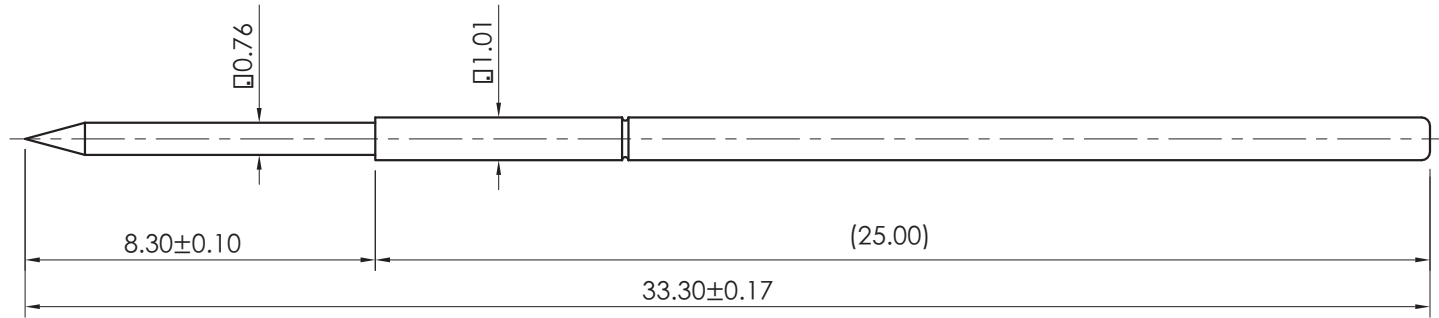

NOTE;

1.Material

Plunger: BeCu Au Plated
 Barrel: PhBz Au Plated
 Spring: SUS304 Not Au Plated

2.Electrical

Rated current : 3A Max.
 Contact resistance: 50 mohm maximum at working stroke(quiescence)

3.Mechanical

Full stroke: 6.30 mm
 Spring Force :100g±20% at 4.20 mm working stroke
 Durability: 100,000 cycles(minimum)

4.RoHS and HF compliant product.

| | | | | | | | |
|---------------------------------------|-----------|--------|------------|---------|-----|--|-------------|
| DRAWN | linyushou | SCALE: | 1 : 1 | UNIT | mm | DRAWING NO. | P-111B-0515 |
| CHECKED | | SHEET: | 1 of 1 | PROJECT | | TITLE. Test Probe | |
| APPROVED | | DATE: | 2013.11.28 | VER. | A.0 | | |
| THE UNMARKED TOLERANCE ARE AS BELOW : | | | | | | C.C.P. (DG) CONTACT PROBES CO.,LTD. | |
| LENGTH | | | ANGLE | | | 东莞中探探针有限公司 | |
| 0~6.0 | ±0.05mm | 0. | ±2.0° | | | | |
| >6~30 | ±0.10mm | 0.0 | ±1.0° | | | | |
| >30~120 | ±0.15mm | 0.00 | ±0.50° | | | | |
| | | | | | | The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission. | |