

4

3

2

1


Please Approve this
Drawing

Date

Signature

REVISIONS (修正)

NO. (序号)	DESCRIPTION(描述)	ECN NO.(变更号)	DATE(日期)
A.0	NEW RELEASE	ECN-2202004008	2020.04.03

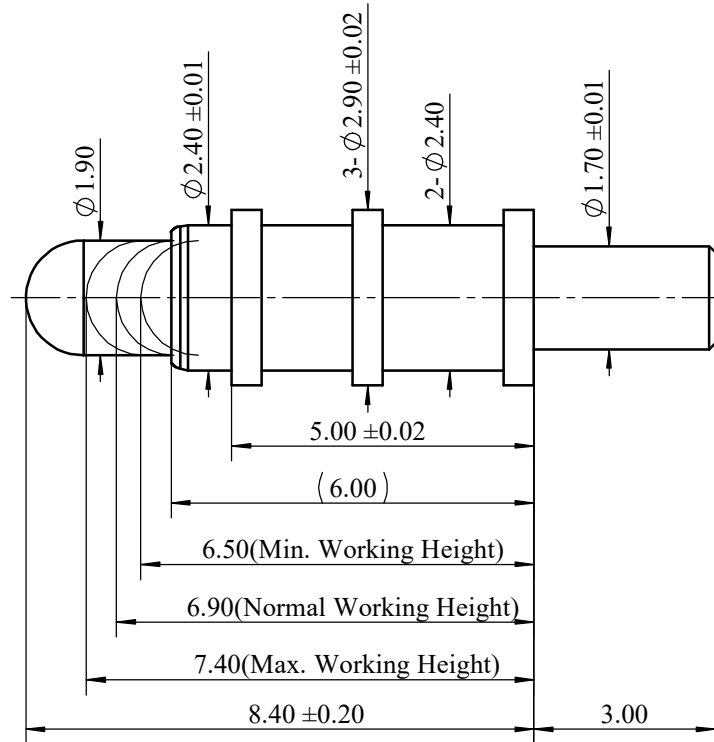

NOTE:

1. Material

Plunger: Brass

Barrel: Brass

Spring: SUS

2. Plating

Plunger: 10 micro-inch minimum Au over 50~120 micro-inch nickel

Barrel: 10 micro-inch minimum Au over 50~120 micro-inch nickel

3. Electrical

Rated current & voltage: DC30V; 3A.

Contact resistance: 50 mohm maximum at working height(quiescence)

4. Mechanical

Spring force: 90g±20g at Normal working height

Durability: 10,000 cycles(minimum)

5. To ensure the best usage, please operate it based on the working height

Based on the engineering drawings, shall not exceed the maximum allowed compression

6. RoHS & HF complied product.

DRAW (设计)	彭世变	SCALE (比例)	10:1	UNIT (单位)	mm	DRAWING NO. (图号)	P07376PH2
COUNTER SIGN (会签)	N/A	SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	Seeing notes (见备注)
AUDIT (审核)	肖大庭	DATE (日期)	2020/4/3	VER (版次)	A.0	TITLE (品名)	Pogo pin Conn.
APPROVE (核准)	肖大庭	PLATE (镀层)	Seeing notes(见备注)				
THE UNMARKED TOLERANCE ARE AS BELOW : (未标记的公差) LENGTH (尺寸)						C.C.P. (DG) CONTACT PROBES CO.,LTD. 东莞中探探针有限公司	
0~6.0 ±0.05mm 0. ±2.0° >6~30 ±0.10mm 0.0 ±1.0° >30~120 ±0.15mm 0.00 ±0.50°						ANGLE (角度)	
The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.							