

4


3

2

1

REVISIONS			
No.	DESCRIPTION	ECN No.	DATE
	INITIAL RELEASE	ECN-2201507047	2015.07.28

Please Approve This Drawing	
Date	
Signature	

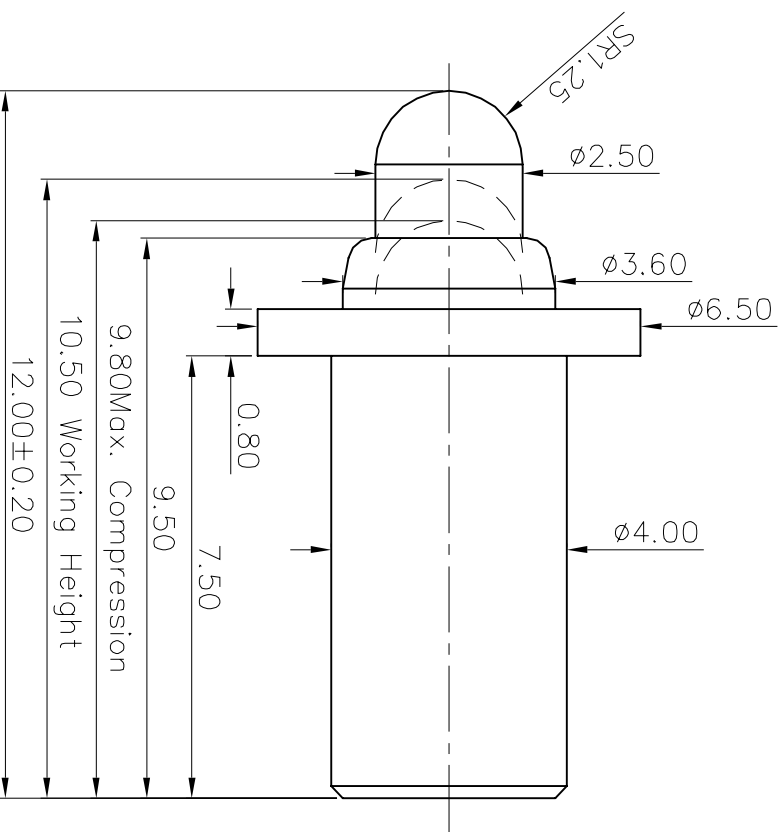

- NOTE:
1. Material
Barrel & Plunger: Brass C3604
Spring: SUS304
 2. Plating
Plunger: 10 micro inch minimum Au over 50~100 micro inch Ni
Barrel: 10 micro inch minimum Au over 50~100 micro inch Ni
 3. Electrical
Rated current & voltage: DC12V; 1A Max. (quiescence).
Contact resistance: 50 mohm Max. at working height (quiescence)
 4. Mechanical
Spring force: 250g ± 20% at working height (quiescence).
Durability: 10,000 cycles (minimum)
 5. To avoid arcing issue, The adaptor start to power supply after connector mated fully.
 6. To ensure the best usage, please operate it based on the working height.
 7. Harmful material control please follow DOC. NO. "D003050"

4

3

2

1

DRAWN	LinYushou	SCALE:	1 : 1	UNIT	mm	DRAWING NO.	P2609PH03
CHECKED		SHEET:	1 of 1	PROJECT		TITLE:	
APPROVED		DATE:	2015.07.28	VER	A.0	Page	Pin
THE UNMARKED TOLERANCE ARE AS BELOW :				C.C.P. (DG) CONTACT PROBES CO., LTD.			
LENGTH	0~6.0 >6~30 >30~120	±0.05mm ±0.10mm ±0.15mm	ANGLE	0 0.00	±2.0° ±1.0° ±0.50°	The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.	
				东莞中探探针有限公司			