

4

3


2

1

Please Approve this Drawing	
Date	
Signature	

REVISIONS (修正)			
NO. (序号)	DESCRIPTION(描述)	DCN NO.(变更号)	DATE(日期)
D.0	NEW RELEASE	DCN-201809124	2018.09.28

R1.75

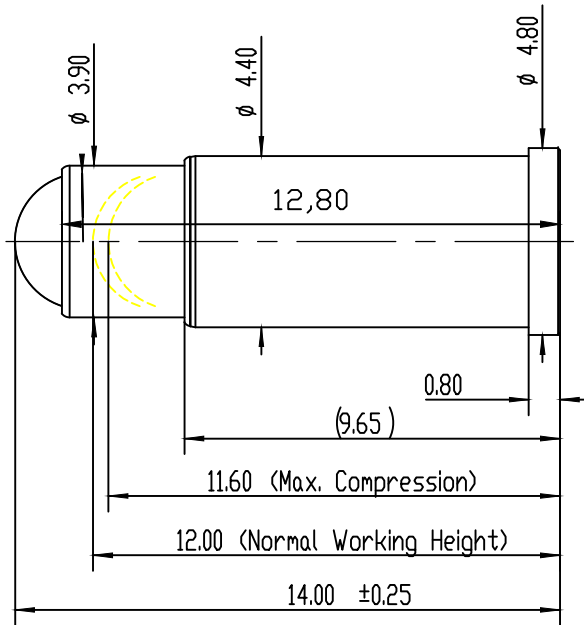

NOTE:

- Material
 - .Plunger1&2: brass
 - .Barrel: brass
 - .Spring: SUS
 - .Ball: brass
- Plating:
 - .Plunger1&2: 10 micro-inch minimum Au over 50~120 micro-inch nickel.
 - .Barrel : 10 micro-inch minimum Au over 50~120 micro-inch nickel.
 - .Ball: 5 microinch mimum Pd over 30 microinch mimum PdNi over 40~80 microinch Ni
- Electrical
 - Rated current & voltage@C12V; 1A .
 - Contact resistance: 10 mohm maximum at working height(quiessence)
- Mechanical
 - Spring force: 9g±20g at Normal working height
 - Durability: 10,000 cycles(minimum)
- To ensure the best usage,please operate it based on the working height
Based on the engineering drawings,shall not exceed the maximum allowed compression
- RoHS & HF complied product.

仅限验证

DRAW (设计)	彭世变	SCALE (比例)	5:1	UNIT (单位)	mm	DRAWING NO. (图号)	P07404FP8
COUNTER SIGN (会签)	N/A	SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	Seeing notes(见备注)
AUDIT (审核)	肖大庭	DATE (日期)	2018/10/9	VER (版本)	D.0	TITLE (品名)	Pogo pin Conn.
APPROVE (批准)	肖大庭	PLATE (镀层)	Seeing notes(见备注)				

THE UNMARKED TOLERANCE ARE AS BELOW :

LENGTH (尺寸)		ANGLE (角度)	
0~6.0	±0.05mm	0.	±2.0°
>6~30	±0.10mm	0.0	±1.0°
>30~120	±0.15mm	0.00	±0.50°

C.C.P. (DG) CONTACT PROBES CO.,LTD.
 东莞中探探针有限公司
 The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission

4

3

2

1