




C.C.P. Contact Probes Co., Ltd

5F, No.8 Lane 24 Ho Ping Rd., Panchiao District, New Taipei City 220, Taiwan R.O.C.
Tel:+886-2-29612525 Fax:+886-2-29610355 <http://www.pccp.com.tw>

DE1-028EF40-06A0

Device

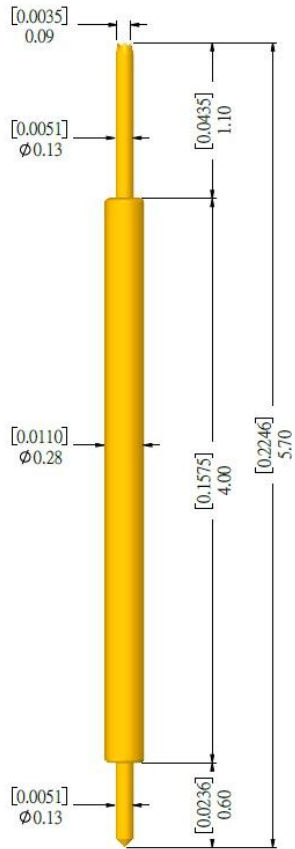

L/B

Material & Finishes

- Device Side Plunger :SK4 alloy with Au plated
- L/B Side Plunger :BeCu alloy with Au plated
- Barrel :Phosphor Bronze alloy with Au plated
- Spring : SUS with Au plated

Mechanical

- Full Travel : 1.00mm
- Recommended Travel : 0.70mm
- Spring Force : 20g ±6g at 0.70mm
- Durability : 200k cycles (minimum)
- Operating Temp. : -55°C~150°C

Electrical Analysis Tools

- Agilent Network Analyzer E5071C
- Tektronix DSA8200
- HFSS, ADS, Q3D, Designer

Electrical Characteristics

- Current Rating : 1A Continuous
- Contact Resistance : <350mΩ (AVG)
- Characteristic Impedance : 49.60Ω
- Insertion Loss: -1dB@17.49GHz
- Return Loss: -20dB@7.92GHz
- Time Delay: 27.70psec
- Loop Inductance: 1.38nH
- Capacitance: 0.56pF

