

4


3

2

1

Please Approve this Drawing	
Date	
Signature	

REVISIONS			
NO.	DESCRIPTION	ECN NO.	DATE
	INITIAL RELEASE	ECN-220120717001	2012.07.17

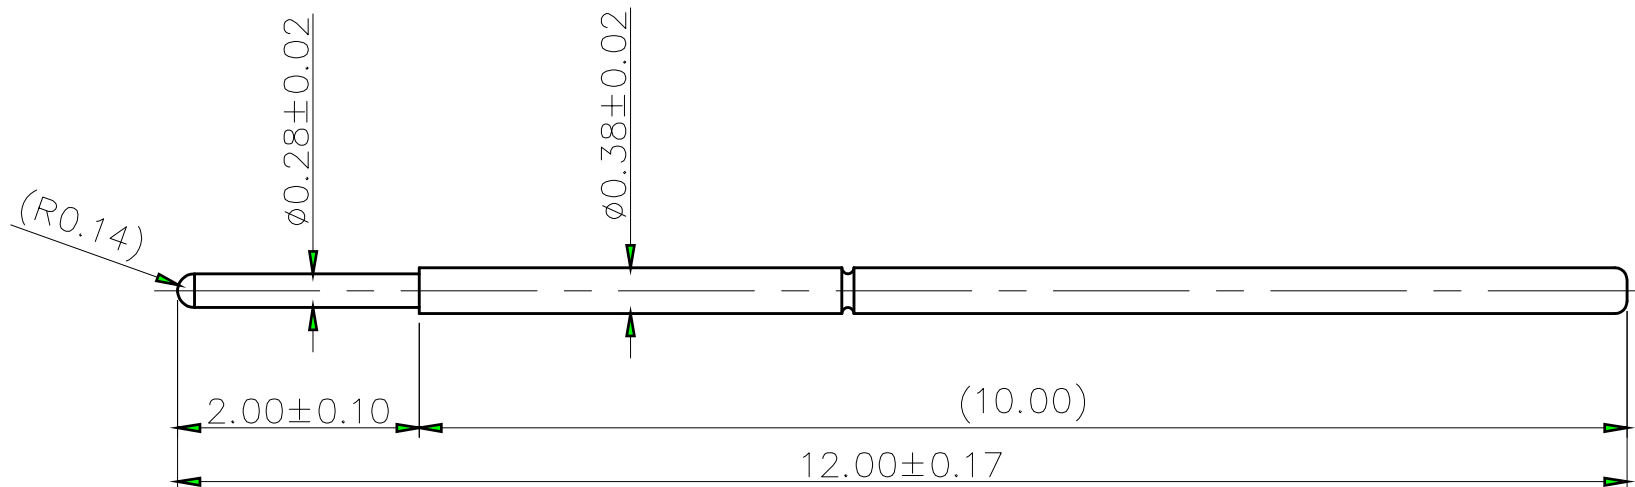

NOTE;

- Material
 - Plunger: SK4 Au Plated
 - Barrel: PhBz Au Plated
 - Spring: SWP Au Plated
- Electrical
 - Rated current : 0.5A Max.
 - Contact resistance: 180 mohm maximum at 2/3 stroke(quiescence)
- Mechanical
 - Full stroke: 2.00 mm
 - Spring Force :30g±20% at 2/3 stroke
 - Spring force: 40g±20% at 2.00mm stroke(reference)
 - Durability: 100,000 cycles(minimum)
- RoHS and HF compliant product.

DRAWN	張永垣	SCALE:	10 : 1	UNIT	mm	DRAWING NO.	P-038DS-0504
CHECKED		SHEET:	1 of 1	PROJECT		TITLE. Test Probe	
APPROVED		DATE:	2012.07.17	VER.	A.0		

THE UNMARKED TOLERANCE ARE AS BELOW :

LENGTH	ANGLE
0~6.0	±0.05mm
>6~30	±0.10mm
>30~120	±0.15mm
	0. ±2.0°
	0.0 ±1.0°
	0.00 ±0.50°

C.C.P. (DG) CONTACT PROBES CO.,LTD.
东莞中探探针有限公司
 The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.

4

3

2

1