

4

3


▽

2

1

Please Approve this Drawing	
Date	
Signature	

REVISIONS			
NO.	DESCRIPTION	ECN NO.	DATE
	INITIAL RELEASE	ECN-220131114	2013.11.12
△			

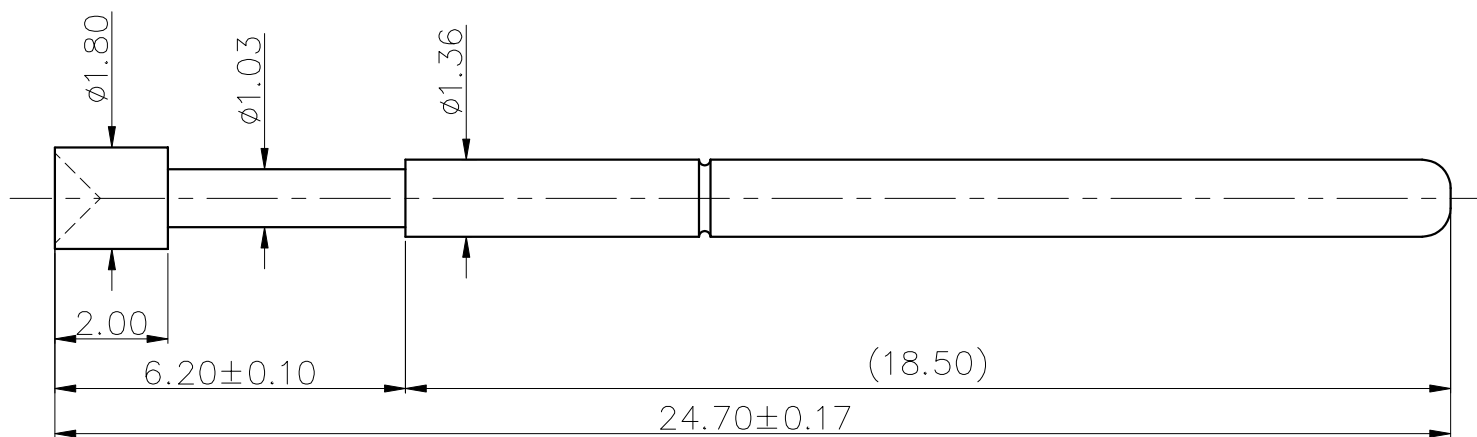

NOTE;

- Material
 - Plunger: BeCu Au Plated
 - Barrel: Brass Au Plated
 - Spring: SUS304 Not Au Plated
- Electrical
 - Rated current : 3A Max.
 - Contact resistance: 50 mohm maximum at working stroke(quiescence)
- Mechanical
 - Full stroke: 4.20 mm
 - Spring Force : $115g \pm 20\%$ at 2.80 mm working stroke
 - Durability: 100,000 cycles(minimum)
- RoHS and HF compliant product.

DRAWN	linyushou	SCALE:	1 : 1	UNIT	mm	DRAWING NO.	P-21A1-0515
CHECKED		SHEET:	1 of 1	PROJECT		TITLE. Test Probe	
APPROVED		DATE:	2013.11.12	VER.	A.0		

THE UNMARKED TOLERANCE ARE AS BELOW :

LENGTH	ANGLE
0~6.0	0.0 ±2.0°
>6~30	±0.05mm 0.0 ±1.0°
>30~120	±0.10mm 0.00 ±0.50°

C.C.P. (DG) CONTACT PROBES CO.,LTD.
东莞中探探针有限公司
 The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.

4

3

▽

2

1