
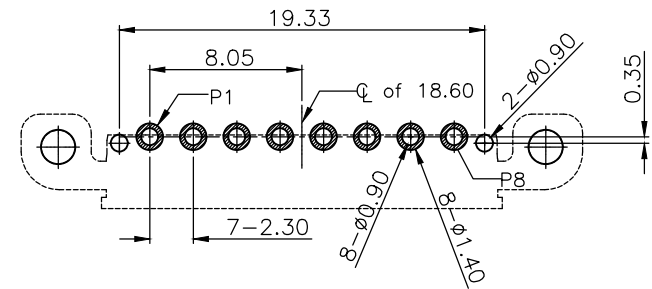
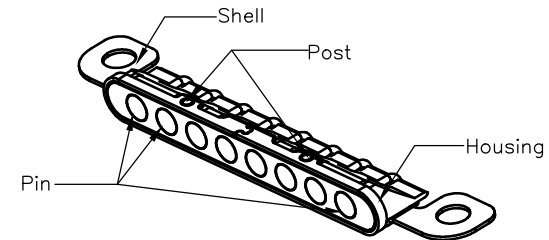
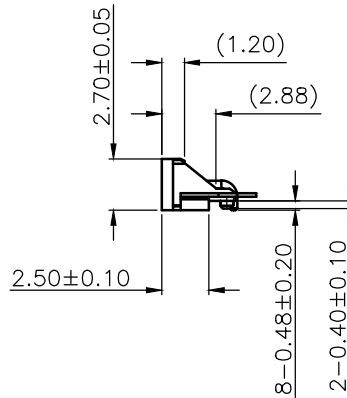
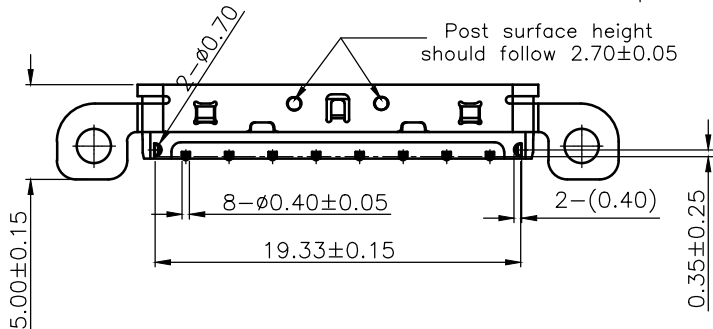
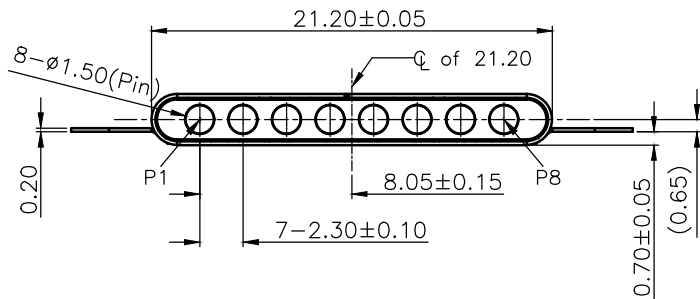


Please Approve this Drawing

Date

Signature

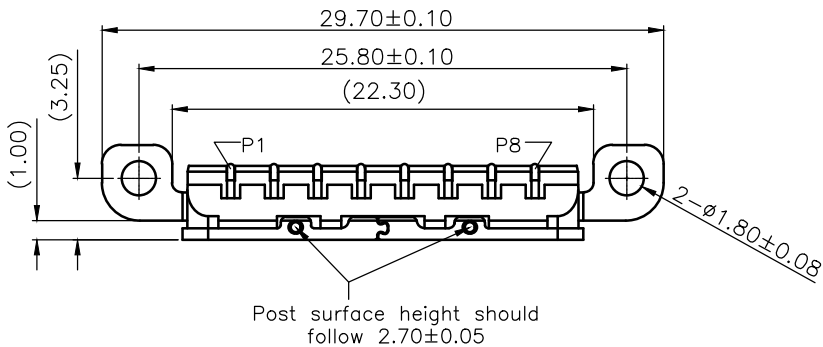

RECOMMEND PCB LAYOUT(TOP VIEW)
Layout Tolerance: ± 0.05mm

REVISIONS (修正)

NO. (序号)	DESCRIPTION(描述)	ECN NO.(变更号)	DATE(日期)
A.0	NEW RELEASE	ECN-2201612012	2016.12.12

NOTES:

1. Materials:

.Housing: LCP UL94V-0; Black.

.Pin&Post: Brass

.Shell: SUS

2. Plating:

.Pin: 30 micro-inch minimum Au over 50~100 micro-inch nickel.

.Shell :30~50 micro-inch black Ni Plated over all.

3. Salt spray:

Salt spray takes 8 hours to test.

4. Harmful material control please follow DOC. NO. "DQ03050"

DRAW (设计)	肖大庭	SCALE (比例)	5 : 2	UNIT (单位)	mm	DRAWING NO. (图号)	P3395FS02-08C230HT
CHECK (校对)		SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	Seeing notes (见备注)
AUDIT (审核)		DATE (日期)	2016.12.12	REV.	A.0	TITLE (品名) 8 pin Conn.	
APPROVE (核准)		PLATE (镀层)	Seeing notes(见备注)				

THE UNMARKED TOLERANCE ARE AS BELOW :
(未标记的公差)
LENGTH (尺寸)

0~6.0	±0.05mm	0.	±2.0°
>6~30	±0.10mm	0.0	±1.0°
>30~120	±0.15mm	0.00	±0.50°

ANGLE (角度)

C.C.P. (DG) CONTACT PROBES CO.,LTD.

东莞中探探针有限公司

The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.