

4


3

2

1

Please Approve this Drawing	
Date	
Signature	

REVISIONS ( 修正)			
NO. (序号)	DESCRIPTION(描述)	ECN NO.(变更号)	DATE(日期)
A.0	NEW RELEASE	ECN-2201701014	2017.01.17

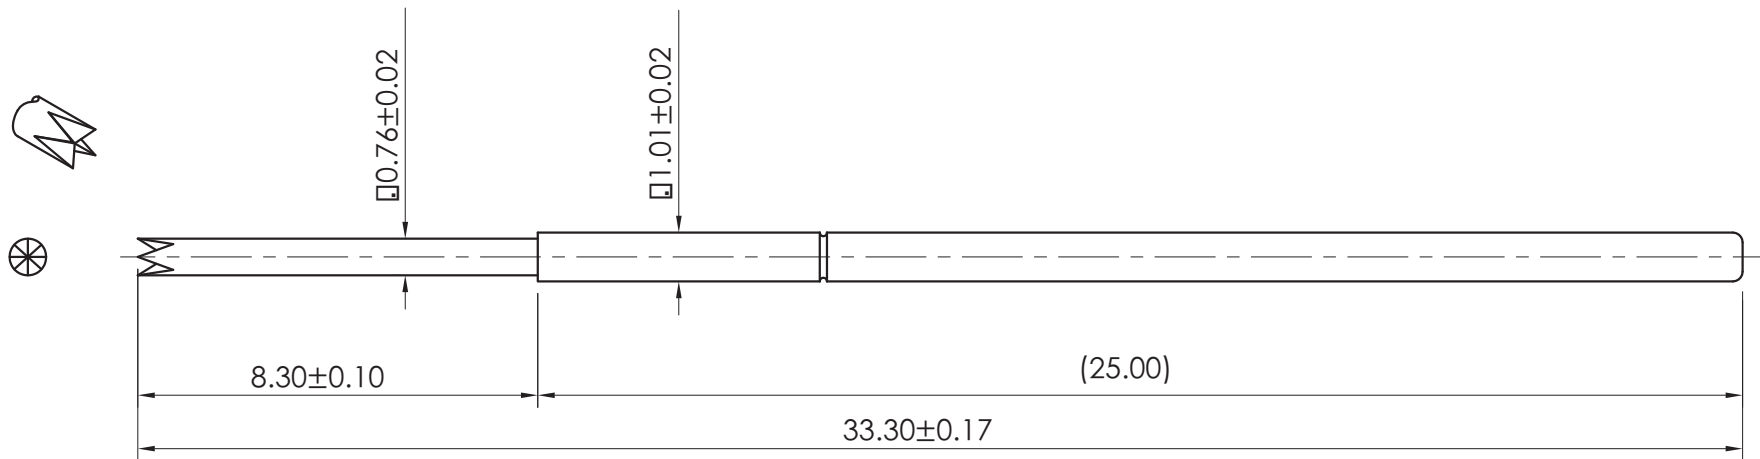

## NOTE;

## 1.Material

Plunger: SK4

Au Plated

Barrel: PhBz

Au Plated

Spring: SUS304

Not Au Plated

## 2.Electrical

Rated current : 3A Max.

Contact resistance: 100 mohm maximum at working stroke(quiescence)

## 3.Mechanical

Full stroke: 6.30 mm

Spring Force : 100g±20% at 4.20 mm working stroke

Durability: 100,000 cycles(minimum)

## 4.Harmful material control please follow DOC. NO."DQ03050"

DRAW (设计)	linyushou	SCALE (比例)	10 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	P-111F1-0515		
CHECK (校对)		SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	seeing notes (见备注)		
AUDIT (审核)		COUNTER SIGN (会签)				DATE (日期)	2017.01.17	REV	A.0
APPROVE (核准)		PLATE (镀层)				TITLE (品名)	Test Probe		

THE UNMARKED TOLERANCE ARE AS BELOW :

(未标记的公差)

LENGTH (尺寸)

ANGLE (角度)

0~6.0	±0.05mm	0.	±2.0°
>6~30	±0.10mm	0.0	±1.0°
>30~120	±0.15mm	0.00	±0.50°

C.C.P. (DG) CONTACT PROBES CO.,LTD.  
东莞中探探针有限公司

The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.

4

3

2

1